

Product

IT5100 Series Battery Testers

Features

Resistance + Voltage simultaneously
measurement and display



3 voltage ranges, 10 μ V~1000V
Optional 7 resistance ranges



4-terminal
AC measurement



Comparator function



Statistics calculation



Measurement setting
configurations storage



Abnormal measurement
inspection



IT5100 Series Battery Testers

APPLICATIONS

- Automatic battery inspection line, R&D
- Electric vehicle batteries
- Lithium batteries
- Button batteries
- Alkaline batteries
- Lead-acid batteries

Your Power Testing Solution



IT5100 Series Battery Testers

It's suitable for the test of lithium-ion battery, fuel cell, super capacitor etc., which can be widely used in the industries like EV, electric products, semiconductors, 5G communication and so on. It can match the applications of industrial research and development, incoming material testing, production line, metrology institute, system integration, universities, research institutes, etc.

Features

- Simultaneous resistance and voltage measurements
- Internal impedance (AC-IR) measurement range: 3mΩ/30mΩ/300mΩ/3Ω/30Ω/300Ω/3kΩ *1
- Open voltage measurement range: ±6V/±60V/±300V; ±10V/±100 V/±1000V (high-voltage models) *2
- 3 voltage ranges, 7 resistance ranges automatic or manual test *3
- Up to 125 measurements /s *4
- 4.3 inch LCD color display
- Built-in USB, LAN interfaces with SCPI support *5
- Statistics calculation and data storage function
- Comparator function
- Zero adjustment function
- 4-terminal AC measurement
- Measuring result alarm function
- Production line dummy-proof and error-proof design
- Support mass production statistics and calculation function

*1 IT5101E: 15 mΩ to 3 Ω

*2 IT5101/E: 10μV ~ 300V

*3 IT5101E is 2 resistance ranges

*4 In Ex_fast mode

*5 For any GPIB interface option request, check with ITECH for availability.

Applications

The wide measuring range and multi-functions makes the IT5100 series ideal for inspection and sorting of all types of batteries. It can be used to validate various types of DUT's requiring test of internal resistance, contact resistance, Equivalent Series Resistance (ESR) etc. It is useful in both R&D, production test and other applications.

- Inspection of the entry and exit of various battery packs such as high-voltage EVs, PHEVs, and residential storage batteries.
- High-voltage battery pack test e.g. electric vehicles, lithium battery etc.
- Battery module testing
- Large (low-resistance) cell testing
- High-speed mass production testing of coin batteries
- UPS inspection
- Deterioration & life assessment of alkaline batteries, lead-acid battery
- Various contact resistance test
- Equivalent Series Resistance (ESR) test

Lithium batteries and secondary batteries



Cellphones



Digital Cameras



Unmanned Aerial Vehicles (UAV)



Electromobility



New Energy Vehicles

Battery-powered Devices

Your Power Testing Solution

IT5100 Series Battery Testers



High Precision and Fast Measurement

High Accuracy

Resistance: $\pm 0.4\% \pm 0.05\%$ FS
Voltage: $\pm 0.01\% \pm 0.01\%$ FS

High Resolution

Resistance: $0.1 \mu\Omega^*$
Voltage: $10 \mu V$

* The resolution is only for IT5101, IT5101E resolution is $10 \mu\Omega$.

High Speed

Resistance+Voltage simultaneously
sampling time < 8 ms
Single sampling time (Resistance
or Voltage) < 4 ms



Resistance + Voltage simultaneously measurement and display

4.3 inch LCD screen

IT5100 series provides 4.3 inch LCD screen. The color screen makes the whole testing and statistics calculation process visible and simple. Support resistance & voltage simultaneous test and display, speed up to 125 measurements/s.



High speed simultaneous resistance and voltage measurement.



High voltage battery testing up to 1000 V



From $3 \text{ m}\Omega$ coin size to 3000Ω large-cell batteries, IT5100 is the choice.



Wide measuring range

Voltage measurement

High voltage range, fitted for fast battery measurement and production line efficiency improvement.

Min. $10 \mu V$ ~ Max. 1000 V

Resistance measurement

Select the performance and cost required for your application.

$150 \mu\Omega$ to 3000Ω

Model	Resistance											
	Measuring range	Resolution	Measuring range	Resolution	Measuring range	Resolution	Measuring range	Resolution	Measuring range	Resolution	Measuring range	Resolution
IT5101	$3 \text{ m}\Omega$	$0.1 \mu\Omega$	$30 \text{ m}\Omega$	$1 \mu\Omega$	$300 \text{ m}\Omega$	$10 \mu\Omega$	3Ω	$0.1 \text{ m}\Omega$	300Ω	$10 \text{ m}\Omega$	3000Ω	0.1Ω
IT5101E	-	-	-	-	$300 \text{ m}\Omega$	$10 \mu\Omega$	3Ω	$0.1 \text{ m}\Omega$	-	-	-	-
IT5101H	$3 \text{ m}\Omega$	$0.1 \mu\Omega$	$30 \text{ m}\Omega$	$1 \mu\Omega$	$300 \text{ m}\Omega$	$10 \mu\Omega$	3Ω	$0.1 \text{ m}\Omega$	300Ω	$10 \text{ m}\Omega$	3000Ω	0.1Ω
Model	Voltage											
	Measuring range				Measuring range				Measuring range			
IT5101	$-6 \text{ V} \sim +6 \text{ V}$				$-60 \text{ V} \sim +60 \text{ V}$				$-300 \text{ V} \sim +300 \text{ V}$			
IT5101E	$-6 \text{ V} \sim +6 \text{ V}$				$-60 \text{ V} \sim +60 \text{ V}$				$-300 \text{ V} \sim +300 \text{ V}$			
IT5101H	$-10 \text{ V} \sim +10 \text{ V}$				$-100 \text{ V} \sim +100 \text{ V}$				$-1000 \text{ V} \sim +1000 \text{ V}$			

Your Power Testing Solution


IT5100 Series Battery Testers

Excellent performance




4-terminal AC Measurement

To avoid the influence caused by testing wire and ensure test precision, IT5100 series adopt AC 4-terminal sensing. This means the tester can test not only internal resistance and voltage simultaneously with high precision, but also support long-term statistical calculations.

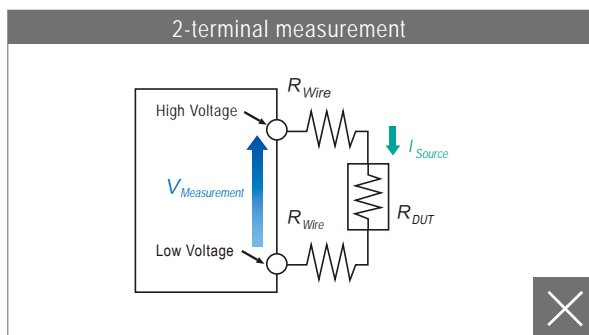

VS

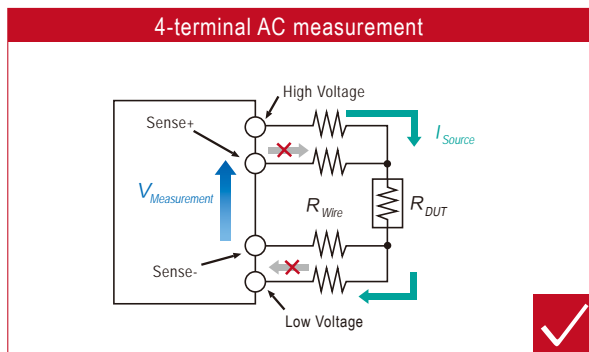

High precision

Resistance: $\pm 0.01\% \pm 0.01\%$ FS

Voltage: $\pm 0.4\% \pm 0.05\%$ FS

High resolution

Resistance: 0.1 $\mu\Omega$ (IT5101E is 1 $\mu\Omega$)

Voltage: 10 μV

High speed

Resistance + voltage

Simultaneous test < 8 ms

Single test < 4 ms

Multifunction



Abnormal measurement inspection

IT5100 series provides 4.3 inch LCD screen. The color screen makes the whole testing and statistics calculation process to be visible and simple. Support simultaneous resistance and voltage test at speed up to 125 times/s.



Averaging function

To ensure test stability and reliability, IT5101 provides calculation functions with easy to use operation.



Comparator function

IT5100 series provides built-in comparator function, the function can distinguish whether the test parameters are compliant with the related standard and automatically counts the pass/fail rate.



- Test resistances & voltage simultaneously
- Alternative setting method
- An alarm signal will be generated when the actual value exceeds the preset (Hi/Lo) range.
- Two setting methods are available for users, the upper and lower limit absolute value or the relative percentage of voltage and resistance. Users can choose depending on their need.
- Manual comparator

Your Power Testing Solution


IT5100 Series Battery Testers



Statistics calculation & Measurement setting configurations storage

Combined with an external USB disk, IT5100 can be used for statistical calculation, which greatly simplifies the process and provides convenience to quality control.

The data storage capacity up to 1000 groups, maximum measurement setting configurations storage capacity up to 126 pcs. And the measurement data of IT5100 series can be stored as .csv file.

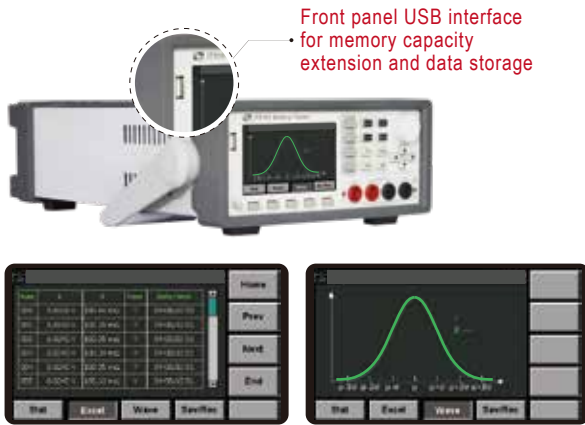

EXT I/O Interface

Triggering, measuring configuration, and zero adjustment can be controlled by EXT I/O interface.

Available for outputting signals, includes comparator results, end of measurement events and measurement errors etc.


Suited for industrial PLC control or synchronization.

IT5100 Series External I/O	
Input	Output
Measurement trigger (TRIG)	End-of-Measurement (EOM)
Print	Measurement-in-Process (INDEX)
Zero adjustment (0ADJ)	Comparator results (R-Hi, R-IN, R-Lo, V-Hi, V-IN, V-Lo, PASS, FAIL)
Manual comparator (MANU)	Measurement error (ERR)
Load panel settings (7 bit) (LOAD 0 ~ LOAD 6)	General-purpose output (OUT1~OUT9)



Built-in multi-interface

IT5100 series supports SCPI protocol and provides built-in USB, LAN interfaces and external control Interface. Simplifying the configuration process and adding flexibility to change interface used without adding additional cost.

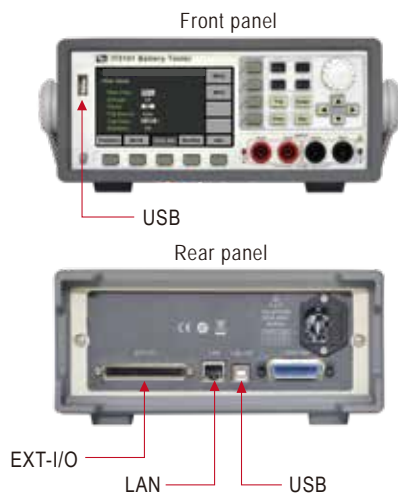

Built-in USB, LAN interfaces, supports SCPI protocol.

Advantages for automatic inspection line measurement

- Built-in LAN, USB interface
- External control interface
- Comparator function
- Impedance & voltage simultaneously judgment
- Beep : When exceeds high/low preset measuring range
- Judgment result in time display
- External I/O output
- Manual comparison
- Used for footswitch or PLC control etc.




Your Power Testing Solution

IT5100 Series Battery Testers

Optional accessories

ITECH provides multiple optional accessories for IT5100 series battery testers, including 4 types of testing wires with different probes and zero adjustment board.

4 types of optional testing wires (600 Vdc max.)



IT-E601 300V
IT-E601H 1000V
Pin type lead




IT-E602 300V
IT-E602H 1000V
Large clip type lead



IT-E603 300V
IT-E603H 1000V
Pin type lead



IT-E605
Zero adjustment board

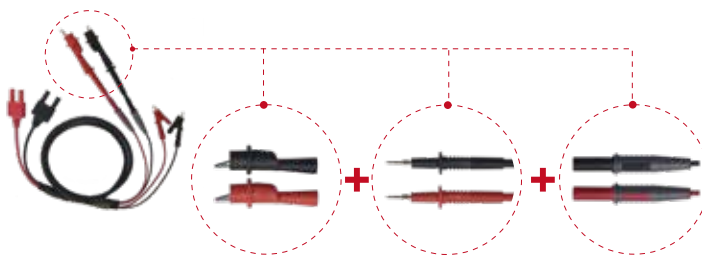

IT-E604 300V / IT-E604H 1000V

PC Application Program

Measurement data can be transferred to a PC and stored as CSV files.

Num	Voltage	Resistance	Voltage State	Resistance State	Date/Time
0	4.99471	0.0546145	0	0	01-07/20:16
1	4.99505	0.5614076	0	0	01-07/20:16
2	4.99517	0.5672807	0	0	01-07/20:16
3	4.99517	0.0548138	0	0	01-07/20:16
4	4.99522	0.0213158	0	0	01-07/20:16
5	4.99519	0.0311247	0	0	01-07/20:16
6	4.99526	0.5600239	0	0	01-07/20:16
7	4.99527	0.0548351	0	0	01-07/20:16



Your Power Testing Solution


IT5100 Series Battery Testers

IT5100 Specifications

Model	IT5101	IT5101E	IT5101H
Measuring range			
Voltage value	Range	-6V~+6V	-60V~+60V
	Resolution	10μV	0.1mV
	Accuracy	±(0.01%+0.01%FS)	±(0.01%+0.01%FS)
	Temperature drift	±(0.001%+0.001%FS)/°C	±(0.001%+0.001%FS)/°C
Resistance value	Range/Resolution	3mΩ/0.1μΩ/100mA	/
	Range/Resolution	30mΩ/1μΩ/100mA	/
	Range/Resolution	300mΩ/10μΩ/10mA	300mΩ/10μΩ/10mA
	Range/Resolution	3Ω/0.1mΩ/1mA	3Ω/0.1mΩ/1mA
	Range/Resolution	30Ω/1mΩ/100mA	/
	Range/Resolution	300Ω/10mΩ/10mA	/
	Range/Resolution	3000Ω/0.1Ω/10mA	/
	Accuracy	±(0.4%+0.05%FS)	±(0.4%+0.05%FS)
		±(0.4%+0.1%FS) (3mΩRange)	±(0.4%+0.1%FS) (3mΩRange)
	Temperature drift	±(0.04%+0.005%FS)	±(0.04%+0.005%FS)
		±(0.04%+0.01%FS) (3mΩRange)	±(0.04%+0.01%FS) (3mΩRange)
	Testing current	1KHz±0.2Hz	1KHz±0.2Hz
Specification			
Response time	10ms		
	(The response time is a reference when measuring pure resistance, which varies depending on the device to be measured)		
Input resistance	≥1mΩ		
Rated input	DC±300V		
Communication Interface	GPIB/USB/LAN		
Operating temperature	0°C~40°C 80%RH below (No condensation)		
Storage temperature	-10°C~50°C 80%RH below (No condensation)		
Size	384*230*105 (mm)		
weight	2.4KG		

1. Add ±0.01%FS for Med, Add ±0.02%FS for Fast, Add ±0.03%FS for Ex_fast
2. 3mΩ range: Add ±0.1%FS for Med, Add ±0.2%FS for Fast, Add ±0.5%FS for Ex_fast
3. Above data is applicable to > 5%FS condition

*This information is subject to change without notice

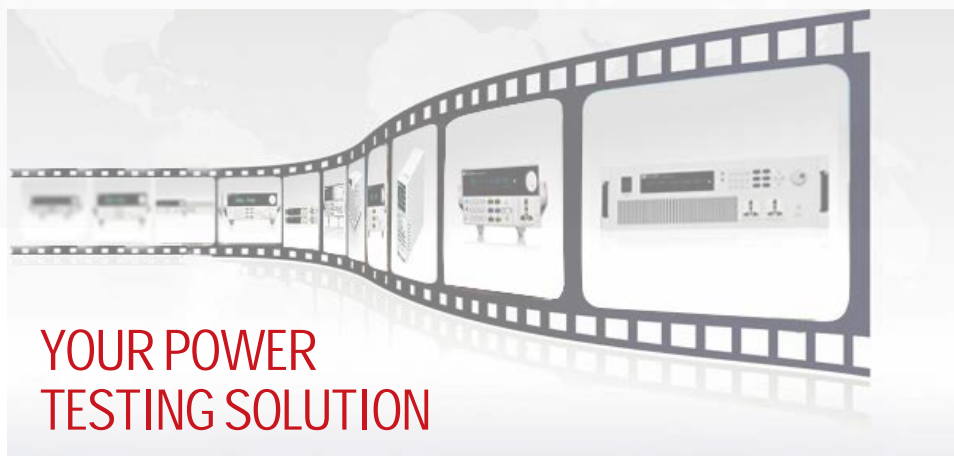

This information is subject to
change without notice.

For more information, please
contact ITECH.

www.itechate.com

Taiwan

TEL: 03-668-4333

FAX: 03-667-6466

E-mail: taiwan@itechate.com.tw

China

TEL: +86-25-52415098

FAX: +86-25-52415268

E-mail: info@itechate.com



ITECH