

M9484C VXG and V3080A

Vector Signal Generator and Frequency Extender

Introduction

This data sheet provides key features and specifications for the M9484C VXG vector signal generator and the V3080A vector signal generator frequency extender.



Table of Contents

About the M9484C VXG Vector Signal Generator	3
Definitions and Conditions	4
Frequency	5
Frequency Reference.....	5
Power	8
Spectral Purity.....	14
Pulse Modulation (Option PMR or PME)	18
Analog I/O (Option AN1)	20
Analog Modulation	20
Vector Modulation (Options Bxx, Rxx).....	23
Internal Baseband Generator (Options Bxx, Rxx)	25
Multi-instrument Synchronization (Option SNC)	29
Error Vector Magnitude (EVM).....	30
Distortion Performance (Adjacent Channel Power Ratio).....	33
Remote Programming	34
General Specifications	34
Related Literature.....	37
Confidently Covered by Keysight Services	37

About the M9484C VXG Vector Signal Generator

You're designing the next RF breakthrough and ensuring that your design delivers maximum throughput, robust links, and data handling capabilities. This introduces a new set of design and test challenges, including more bandwidths, frequency bands, and system complexity.

Keysight has created the ultimate VXG signal generator to take your designs to the widest bandwidths, highest frequencies, and multichannel applications. With this fully integrated, calibrated, and synchronized solution, you don't need to worry about the errors caused by additional connections and instruments. Through integration with PathWave Signal Generation software, create performance-optimized reference signals and reduce the time you spend on signal simulation.

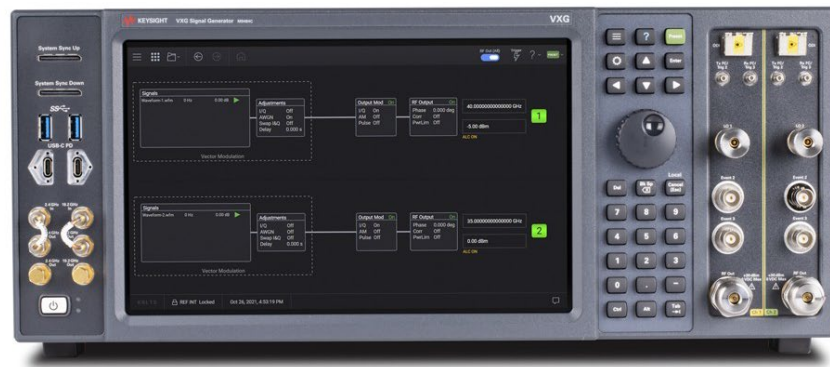


Figure 1. M9484C VXG signal generator with two 54 GHz channels.

Definitions and Conditions

Specification

Specifications represent warranted performance of a calibrated instrument that has been stored for a minimum of 2 hours within the operating temperature of 0 to 50 °C, unless otherwise stated, and after a 45-minute warm-up period. The specifications include measurement uncertainty. Data represented in this document are specifications unless otherwise noted. Performance specifications do not apply when in SDW or ARF launch mode.

Typical

Typical (typ) describes additional product performance information that is not covered by the product warranty. It is performance beyond specifications that 80 percent of the units exhibit with a 90 percent confidence level at room temperature (approximately 25 °C). Typical performance does not include measurement uncertainty.

Nominal

Nominal (nom) values indicate the expected mean or average performance, or an attribute whose performance is by design, such as the 50-ohm connector. This data is not warranted and is measured at room temperature (approximately 25 °C).

Measured

Measured (meas) describes an attribute measured during the design phase for purposes of communicating expected performance, such as amplitude drift vs. time. This data is not warranted and is measured at room temperature (approximately 25 °C).

All of the above apply when using the instrument in its default settings unless otherwise stated.

Data contained within this document does not apply to V3080A unless otherwise stated.

V3080A specifications apply only when used with included 2 meter cable (V3080A-7RM) in good condition. V3080A specifications apply after a 5-hour warm-up period. V3080A must be used with an M9484C VXG with instrument software version A.15.00 or later.

Frequency

Frequency Options

Option	CW Frequency Range	RF Output Connector
M9484C-506	9 kHz to 6 GHz	Type-N (f)
M9484C-508	9 kHz to 8.5 GHz	Type-N (f)
M9484C-514	9 kHz to 14 GHz	3.5 mm (m)
M9484C-520	9 kHz to 21.6 GHz	3.5 mm (m)
M9484C-532	9 kHz to 31.8 GHz	1.85 mm (m)
M9484C-544	9 kHz to 44 GHz	1.85 mm (m)
M9484C-554	9 kHz to 54 GHz	1.85 mm (m)
V3080A-F06 ¹	10 MHz to 67 GHz	1.0 mm (m)
V3080A-F07 ¹	10 MHz to 75 GHz	1.0 mm (m)
V3080A-F09 ¹	10 MHz to 90 GHz	1.0 mm (m)
V3080A-F11 ¹	10 MHz to 100 GHz (overrange to 110 GHz)	1.0 mm (m)

Frequency Resolution

CW	0.00001 Hz
----	------------

Phase Adjustments

Phase offset range	$\pm 180^\circ$
Phase offset resolution	0.001°

Relative Phase Adjustments (Option PCH and SNC²)³

Relative phase offset range	$\pm 180^\circ$
Relative phase offset resolution	0.001°
Relative phase repeatability	0.0001° (nom) ⁴

Frequency Switching Speed^{5,6}

	M9484C	V3080A
10 MHz to 54 GHz	3.0 ms (meas)	30 ms (meas)
54 GHz to 110 GHz	-	36 ms (meas)
10 MHz to 110 GHz, crossing over 54 GHz	-	50 ms (meas)

Frequency Reference

Frequency Accuracy

Calculation		\pm (time since last adjustment x aging rate) \pm temperature effects \pm calibration accuracy
Aging rate ⁷	First year	0.05 ppm/year, after 72-hour warm-up
	Second year	0.03 ppm/year, after 72-hour warm-up
Temperature effects (nom)	20 to 30 °C	$< \pm 10$ ppb
	Full temperature range	$< \pm 50$ ppb
Initial achievable calibration accuracy ⁸		$\pm 5 \times 10^{-8}$
Warm Up (nom)		
5 minutes over +20 to +30 °C, with respect to 1 hour		$< \pm 0.1$ ppm
15 minutes over +20 to +30 °C, with respect to 1 hour		$< \pm 0.01$ ppm

1 V3080A requires an M9484C with option AL2 and 532, 544, or 554. If Option 532 or 544 are selected, settable frequency will stop at the specified maximum frequency for that option and resume at 52.8 GHz when the V3080A is connected.

2 Option SNC requires Option PCH on all M9484Cs and appropriate cabling of LOs and trigger lines between M9484Cs to achieve results, taking fanout limitations into consideration.

3 Channel 1 relative to channel 2, for example.

4 When tuning from f1 to f2 and back to f1.

5 Time from receipt of SCPI command to frequency within 0.1 ppm of final frequency or within 100 Hz, whichever is greater, and amplitude within 1 dB of final amplitude.

6 For information on Agile RF mode switching speeds, etc. see *Agile RF (ARF) operating mode* section of this datasheet.

7 Not verified by Keysight N7800A TME Calibration and Adjustment Software. Daily aging rate may be verified as a supplementary chargeable service, on request.

8 At time of shipment.

External Reference Input

Standard	10 MHz, 100 MHz
Option 1ER	1 MHz to 110 MHz flexible reference External 1 pulse per second (PPS)
Input frequency setting resolution (1ER)	0.1 Hz
Wide locking range	± 1.0 ppm (nom), optimized for best phase stability
Narrow locking range	± 0.6 ppm (nom), optimized for best close-in phase noise
Amplitude	-3 dBm to +20 dBm (nom)
Connector	BNC female
Impedance	50 Ω (nom)

External Reference Input PLL Synchronization Bandwidths

External Reference Frequency	Synchronization Loop Bandwidth	
	Narrow	Wide
10 MHz	0.015 Hz	70 Hz
100 MHz	0.015 Hz	70 Hz
Flexible Reference (1ER) 1 – 110 MHz	0.015 Hz	70 Hz

Reference Outputs

10 MHz Out


Amplitude ⁹	≥ 5 dBm, 7 dBm (typ), square wave
Connector	BNC female
Impedance	50 Ω (nom)

19.2 GHz Out

Amplitude ⁹	+7.3 dBm (nom) sine wave
Connector	SMA female
Impedance	50 Ω (nom)

2.4 GHz Out¹⁰

Amplitude ⁹	+7.3 dBm (nom) sine wave
Connector	SMA female
Impedance	50 Ω (nom)

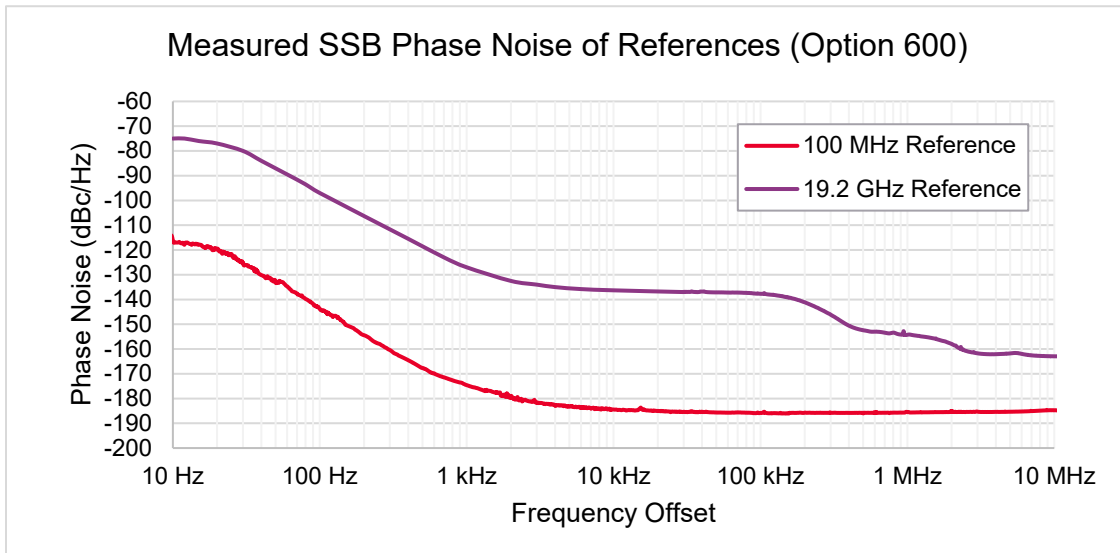


⁹ Does not include a guard band for performance distribution, measurement uncertainty, or environmental variables.

¹⁰ Available on instruments with Options 514, 520, 532, 544, or 554.

Auxiliary Fixed LO (Option AL2)¹¹

	Frequency	Amplitude
User selectable outputs	2.4 GHz	+11 dBm (meas.)
	4.8 GHz	+7.5 dBm (meas.)
	9.6 GHz	+6 dBm (meas.)
	19.2 GHz	-2 dBm (meas.)
Connector	APC 3.5 mm	
Impedance	50 Ω (nom.)	

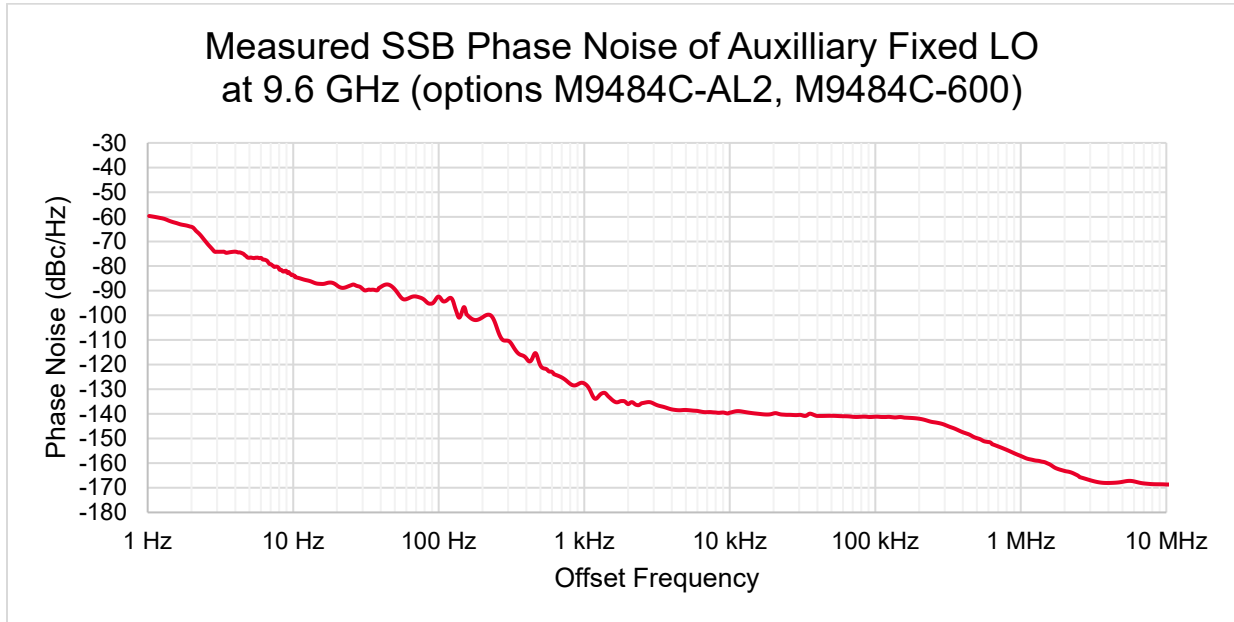

¹¹ Available on M9484C with Options 532, 544, or 554. Required to pair M9484C with V3080A.

Power

Output Parameters

Settable range	Standard	-135 dBm to +20 dBm
	Options 1EA, 1EB, or 1EC	-135 dBm to +30 dBm
	V3080A	-115 dBm to +30 dBm
Resolution		0.01 dB
Output impedance		50 Ω (nom)
Maximum reverse power		+27 dBm, 0 VDC (nom)
Attenuator type		Electronic




Maximum Output Power, Temperature Range 22 to 28 °C, () = Typical

Options 506 and 508			
Frequency Range	Standard	Option 1EA	
9 kHz to 1 MHz	(+12 dBm)	(+12 dBm)	
> 1 MHz to 10 MHz	+10 dBm	+10 dBm (+12 dBm)	
> 10 MHz to 4 GHz	+18 dBm	+20 dBm (+24 dBm)	
> 4 GHz to 8.5 GHz	+18 dBm	+20 dBm (+23 dBm)	
Options 514 and 520			
Frequency Range	Standard	Option 1EB	Harmonic Filters Enabled (Selectable with Option 1EH) ¹²
9 kHz to 1 MHz	(0 dBm)	(0 dBm)	(0 dBm)
> 1 MHz to 10 MHz	+10 dBm	+10 dBm (+12 dBm)	+10 dBm (+12 dBm)
> 10 MHz to 4 GHz	+18 dBm	+20 dBm (+24 dBm)	+12 dBm (+13 dBm)
> 4 GHz to 8.5 GHz	+18 dBm	+20 dBm (+23 dBm)	+7 dBm (+9 dBm)
> 8.5 GHz to 14.7 GHz	+18 dBm	+20 dBm (+23 dBm)	+8.5 dBm (+10 dBm)
> 14.7 GHz to 19 GHz	+18 dBm	+19 dBm (+22 dBm)	-
> 19 GHz to 21.6 GHz	+17 dBm	+17 dBm (+22 dBm)	-
Options 532, 544, and 554			
Frequency Range	Standard	Option 1EC	Harmonic Filters Enabled (Selectable with Option 1EH) ¹²
9 kHz to 1 MHz	(0 dBm)	(0 dBm)	(0 dBm)
> 1 MHz to 10 MHz	+10 dBm	+10 dBm (+12 dBm)	+10 dBm (+12 dBm)
> 10 MHz to 4 GHz	+18 dBm	+20 dBm (+21 dBm)	+10 dBm (+12 dBm)
> 4 GHz to 8.5 GHz	+18 dBm	+20 dBm (+21 dBm)	+5 dBm (+8 dBm)
> 8.5 GHz to 14.7 GHz	+18 dBm	+19 dBm (+20 dBm)	+8.5 dBm (+10 dBm)
> 14.7 GHz to 19 GHz	+18 dBm	+18 dBm (+19 dBm)	-
> 19 GHz to 21.6 GHz	+16 dBm	+16 dBm (+17 dBm)	-
> 21.6 GHz to 22.5 GHz	+18 dBm	+18 dBm (+20 dBm)	-
> 22.5 GHz to 32 GHz	+18 dBm	+22 dBm (+23 dBm)	-
> 32 GHz to 43 GHz	+15 dBm	+19 dBm (+21 dBm)	-
> 43 GHz to 44.5 GHz	+11 dBm	+16 dBm (+19 dBm)	-
> 44.5 GHz to 50 GHz	+11 dBm	+14.5 dBm (+17.5 dBm)	-
> 50 GHz to 54 GHz	+10 dBm	+12 dBm (+14 dBm)	-
V3080A ¹³			
Frequency Range	Standard		
9 kHz to < 52.8 GHz	See maximum output power for Options 532, 544, and 554 and subtract cable loss and bypass path loss ¹⁴		
≥ 52.8 GHz to 65 GHz	+13 dBm (+14.5 dBm)		
> 65 GHz to 75 GHz	+14.5 dBm (+16.5 dBm)		
> 75 GHz to 90 GHz	+12.5 dBm (+15 dBm)		
> 90 GHz to 95 GHz	+10.5 dBm (+12 dBm)		
> 95 GHz to 100 GHz	+5 dBm (+12 dBm)		
> 100 GHz to 110 GHz	(-25 dBm)		


¹² Refer to standard, 1EB, or 1EC column for frequencies above 14.5 GHz.

¹³ V3080A performance applies after a **Power Accuracy Adjustment**.


¹⁴ Refer to **V3080A Getting Started Guide** for connection diagrams and additional details.

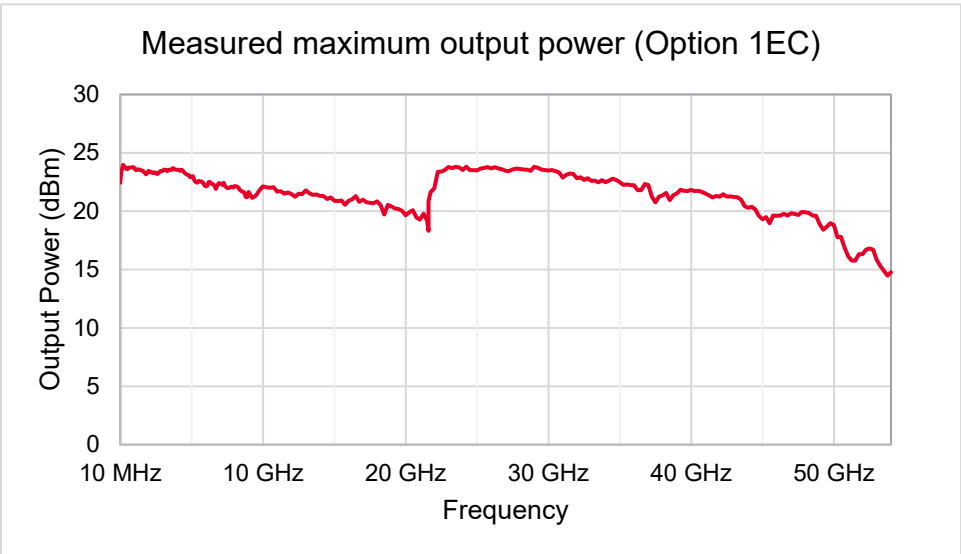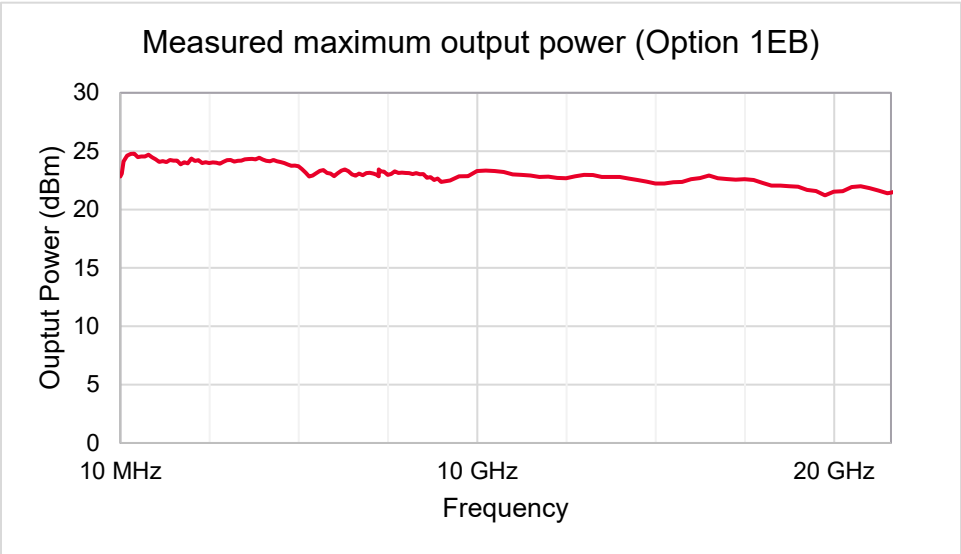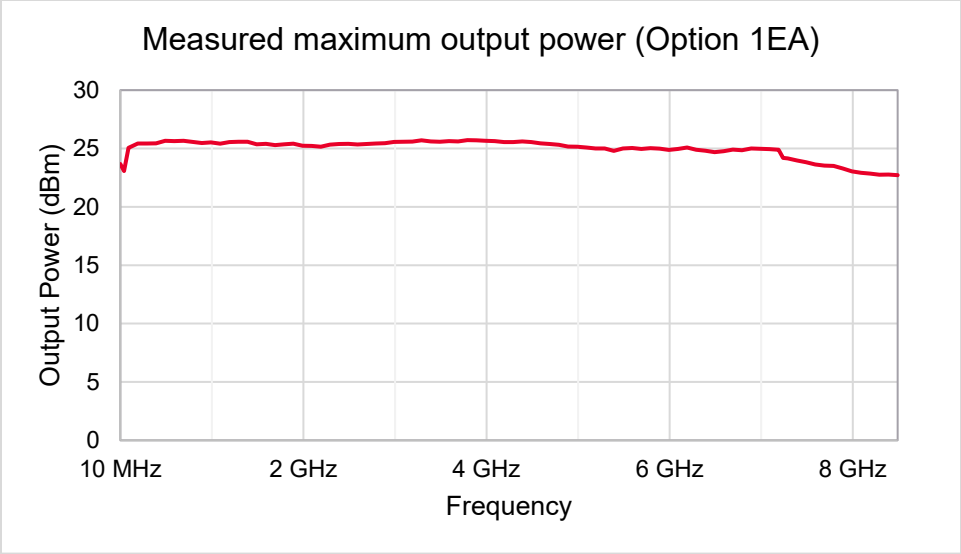


Measured maximum output power
(V3080A with included 2m cable)

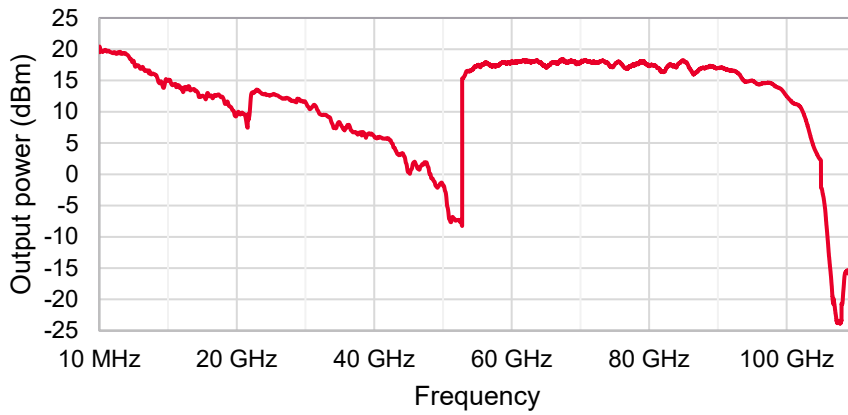

Average gain (loss) response of
V3080A bypass path

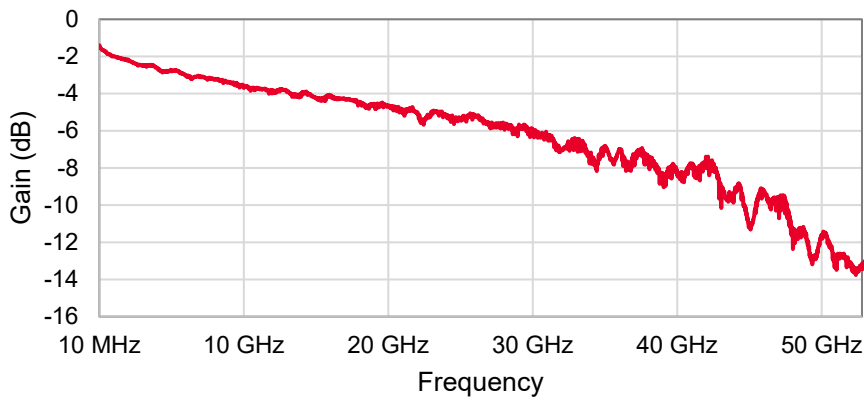

Cable gain (loss) in V3080A bypass path
for Keysight cables

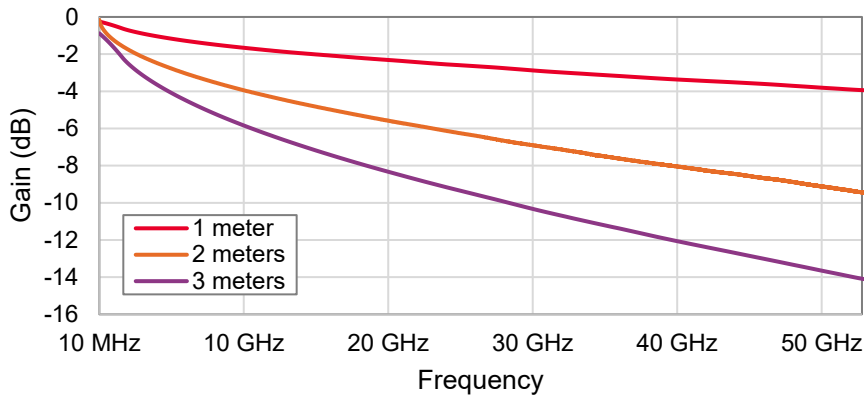

M9484C Absolute Level Accuracy¹⁵ (CW), Temperature Range from +22 °C to +28 °C, ALC on, () = Typical

Frequency Range	+15 dBm or Maximum Specified Power to -60 dBm	< -60 dBm to -90 dBm	< -90 dBm to -110 dBm
> 12 MHz to 6 GHz	< ±1.6 dB (±0.3 dB)	< ±1.4 dB (< ±0.3 dB)	< ±1.8 dB (< ±0.5 dB)
> 6 GHz to 8.5 GHz	< ±1.1 dB (±0.3 dB)	< ±1.6 dB (< ±0.5 dB)	< ±2.5 dB (< ±1 dB)
> 8.5 GHz to 17 GHz	< ±1.2 dB (±0.3 dB)	< ±2.1 dB (< ±0.8 dB)	< ±2.6 dB (< ±1 dB)
> 17 GHz to 20 GHz	< ±1.7 dB (< ±0.5 dB)	< ±2.7 dB (< ±1 dB)	< ±2.6 dB (< ±1 dB)
> 20 GHz to 37 GHz	< ±1.3 dB (±0.3 dB)	< ±1.8 dB (< ±0.5 dB)	< ±2.6 dB (< ±0.7 dB)
> 37 GHz to 44 GHz	< ±1.3 dB (±0.3 dB)	(< ±1.5 dB)	(< ±1.5 dB)
> 44 GHz to 50 GHz	< ±2.1 dB (< ±0.7 dB)	(< ±1.5 dB)	(< ±1.5 dB)
> 50 GHz to 54 GHz	< ±2.2 dB (< ±0.7 dB)	(< ±1.5 dB)	(< ±2 dB)

M9484C Absolute Level Accuracy¹⁵ (CW), Temperature Range from +22 °C to +28 °C, ALC off, () = Typical

Frequency Range	+10 dBm or Maximum Specified Power to -60 dBm	< -60 dBm to -90 dBm	< -90 dBm to -110 dBm
> 1 MHz to 12 MHz	< ±1.5 dB (< ±0.5 dB)	n/a	n/a
> 12 MHz to 6 GHz	< ±1.6 dB (< ±0.3 dB)	< ±1.7 dB (< ±0.4 dB)	< ±1.8 dB (< ±0.4 dB)
> 6 GHz to 8.5 GHz	< ±1.5 dB (< ±0.5 dB)	< ±1.6 dB (< ±0.5 dB)	< ±2.5 dB (< ±1 dB)
> 8.5 GHz to 17 GHz	< ±1.7 dB (< ±0.5 dB)	< ±2.7 dB (< ±1.1 dB)	< ±2.6 dB (< ±1.1 dB)
> 17 GHz to 20 GHz	< ±2.5 dB (< ±1 dB)	< ±2.7 dB (< ±1.1 dB)	< ±2.6 dB (< ±1.1 dB)
> 20 GHz to 37 GHz	< ±1.6 dB (< ±0.5 dB)	< ±1.8 dB (< ±0.6 dB)	< ±3.1 dB (< ±0.8 dB)
> 37 GHz to 44 GHz	< ±1.6 dB (< ±0.5 dB)	(< ±2 dB)	(< ±2 dB)
> 44 GHz to 50 GHz	< ±2.6 dB (< ±0.8 dB)	(< ±2 dB)	(< ±2 dB)
> 50 GHz to 54 GHz	< ±2.7 dB (< ±0.8 dB)	(< ±1.5 dB)	(< ±2 dB)

M9484C Absolute Level Accuracy in IQ Mode Relative to CW, Temperature Range from +22 °C to +28 °C, ALC Auto, +10 to -20 dBm¹⁶

Frequency Range	3GPP W-CDMA Test Model 1 with 64 DPCH, 4 Carrier	5G NR 8cc x 100 MHz (800 MHz), 256QAM, 120 kHz SCS, NRB = 66
12 MHz to 8.5 GHz	±0.3 dB (nom)	±0.4 dB (nom)
> 8.5 GHz to 20 GHz	±0.5 dB (nom)	±0.8 dB (nom)
> 20 GHz to 30 GHz	±0.8 dB (nom)	±2.0 dB (nom)
> 30 GHz to 35 GHz	±0.2 dB (nom)	±0.65 dB (nom)
> 35 GHz to 54 GHz	±0.25 dB (nom)	±0.9 dB (nom)

V3080A Absolute Level Accuracy (CW)^{17,18}, Temperature Range from +22 °C to +28 °C, ALC on, () = Typical

Frequency Range	+10 dBm or Maximum Specified Power to < -10 dBm	-10 dBm to < -20 dBm	-20 dBm to < -60 dBm	-60 dBm to < -90 dBm	-90 dBm to < -110 dBm
10 MHz to < 6 GHz	-	-	< (±1.0 dB)	< (±1.0 dB)	< (±1.25 dB)
6 GHz to < 8.5 GHz	-	-	< (±1.0 dB)	< (±1.0 dB)	< (±1.25 dB)
8.5 GHz to < 17 GHz	-	-	< (±1.0 dB)	< (±1.25 dB)	< (±1.5 dB)
17 GHz to < 20 GHz	-	-	< (±1.25 dB)	< (±1.25 dB)	< (±1.5 dB)
20 GHz to < 37 GHz	-	-	< (±2.25 dB)	< (±2.25 dB)	< (±2.5 dB)
37 GHz to < 44 GHz	-	-	< (±2.25 dB)	< (±2.5 dB)	< (±3.0 dB)
44 GHz to < 50 GHz	-	-	< (±2.0 dB)	< (±2.5 dB)	< (±3.0 dB)
50 GHz to < 52.8 GHz	-	-	< (±2.0 dB)	< (±2.5 dB)	< (±3.0 dB)
52.8 GHz to < 60 GHz	< (±1.25 dB)	< (±1.5 dB)	< (±2.0 dB)	< (±2.0 dB)	< (±2.0 dB)
60 GHz to < 70 GHz	< (±1.0 dB)	< (±1.5 dB)	< (±2.0 dB)	< (±2.0 dB)	< (±2.0 dB)
70 GHz to < 85 GHz	< (±1.0 dB)	< (±1.5 dB)	< (±3.0 dB)	< (±3.0 dB)	< (±3.25 dB)
85 GHz to < 90 GHz	< (±1.0 dB)	< (±1.5 dB)	< (±2.0 dB)	< (±3.0 dB)	< (±3.0 dB)
90 GHz to < 100 GHz	< (±2.0 dB)	< (±1.5 dB)	< (±1.5 dB)	< (±5.0 dB)	< (±5.25 dB)

15 When harmonic filters are enabled (selectable with Option 1EH), specification ≤ 7.25 GHz is ±2.0 dB at all power levels.

For frequencies < 35 MHz specifications < -70 dBm do not apply.

16 For instruments with Option 532, 544, or 554, absolute level accuracy in IQ mode relative to CW applies +5 to -20 dBm from 7.25 GHz to 21.6 GHz.

17 If the V3080A has been turned off and stored at room temperature, it is recommended that it is turned on and thermally stabilized to bake out any relative amplitude drift. At 70% humidity and 30 °C, a warm up time of:

- 2 hours results in approximately 0.15 dB relative amplitude drift.
- 5 hours results in approximately 0.05 dB relative amplitude drift.
- 10 hours (recommended) results in no measurable relative amplitude drift.

18 V3080A performance applies after a **Power Accuracy Adjustment**.

V3080A Absolute Level Accuracy (CW)^{19,20}, Temperature Range from +22 °C to +28 °C, ALC off, () = Typical

Frequency Range	+10 dBm or Maximum Specified Power to < -10 dBm	-10 dBm to < -20 dBm	-20 dBm to < -60 dBm	-60 dBm to < -90 dBm	-90 dBm to < -110 dBm
10 MHz to < 6 GHz	-	-	< (±1.2 dB)	< (±1.2 dB)	< (±1.45 dB)
6 GHz to < 8.5 GHz	-	-	< (±1.2 dB)	< (±1.2 dB)	< (±1.45 dB)
8.5 GHz to < 17 GHz	-	-	< (±1.2 dB)	< (±1.45 dB)	< (±1.7 dB)
17 GHz to < 20 GHz	-	-	< (±1.35 dB)	< (±1.35 dB)	< (±1.6 dB)
20 GHz to < 37 GHz	-	-	< (±2.45 dB)	< (±2.45 dB)	< (±2.7 dB)
37 GHz to < 44 GHz	-	-	< (±2.45 dB)	< (±2.7 dB)	< (±3.2 dB)
44 GHz to < 50 GHz	-	-	< (±2.2 dB)	< (±2.7 dB)	< (±3.2 dB)
50 GHz to < 52.8 GHz	-	-	< (±2.2 dB)	< (±2.7 dB)	< (±3.2 dB)
52.8 GHz to < 60 GHz	< (±1.75 dB)	< (±2.0 dB)	< (±2.5 dB)	< (±2.3 dB)	< (±2.3 dB)
60 GHz to < 70 GHz	< (±1.5 dB)	< (±2.0 dB)	< (±2.5 dB)	< (±2.3 dB)	< (±2.3 dB)
70 GHz to < 85 GHz	< (±1.5 dB)	< (±2.0 dB)	< (±3.5 dB)	< (±3.3 dB)	< (±3.55 dB)
85 GHz to < 90 GHz	< (±1.5 dB)	< (±2.0 dB)	< (±2.5 dB)	< (±3.3 dB)	< (±3.3 dB)
90 GHz to < 100 GHz	< (±2.5 dB)	< (±2.0 dB)	< (±2.0 dB)	< (±5.3 dB)	< (±5.55 dB)

V3080A Absolute Level Accuracy in IQ Mode Relative to CW^{19,20}, Temperature Range from +22 °C to +28 °C, ALC Auto, +10 to -20 dBm

Frequency Range	3GPP W-CDMA Test Model 1 with 64 DPCH, 4 Carrier	5G NR 8cc x 100 MHz (800 MHz), 256QAM, 120 kHz SCS, NRB = 66
52.8 GHz to 100 GHz	±2 dB (nom)	±2 dB (nom)

VSWR (Meas)²¹

Frequency	Options 506, 508
240 MHz to 6 GHz	2.0
6 GHz to 8.5 GHz	1.9
Frequency	Options 514, 520
240 MHz to 6 GHz	1.6
6 GHz to 8.5 GHz	1.7
8.5 GHz to 17 GHz	1.8
17 GHz to 21.6 GHz	1.9
Frequency	Options 532, 544, 554
240 MHz to < 7.25 GHz	1.7
7.25 GHz to < 21.6 GHz	1.95
21.6 GHz to < 25 GHz	1.75
25 GHz to < 36.5 GHz	1.6
36.5 GHz to < 40 GHz	2.1
40 GHz to < 50 GHz	1.8
50 GHz to < 54 GHz	2.1
Frequency	V3080A
9 kHz to < 6 GHz	1.375
6 GHz to < 17 GHz	1.75
17 GHz to < 21.6 GHz	3
21.6 GHz to < 52.8 GHz	5.25
52.8 GHz to < 78 GHz	2.2
78 GHz to < 101 GHz	2.35

19 If the V3080A has been turned off and stored at room temperature, it is recommended that it is turned on and thermally stabilized to bake out any relative amplitude drift. At 70% humidity and 30 °C, a warm up time of:

- 2 hours results in approximately 0.15 dB relative amplitude drift.
- 5 hours results in approximately 0.05 dB relative amplitude drift.
- 10 hours (recommended) results in no measurable relative amplitude drift.

20 V3080A performance applies after a **Power Accuracy Adjustment**.

21 Harmonic filters not enabled (selectable with Option 1EH). For CW operation; level range not valid when vector modulation is on.

Amplitude Switching Speed ²²	M9484C	V3080A
-110 dBm to +15 dBm	2.8 ms (meas)	30 ms (meas)

Phase Linearity vs Power

Frequency	Power Range ²³	Phase Linearity vs Power
10 MHz to 10 GHz	+15 dBm to -80 dBm	1° RMS (meas)
> 10 GHz to 20 GHz	+15 dBm to -80 dBm	2° RMS (meas)
> 20 GHz to 50 GHz	+15 dBm to -80 dBm	3° RMS (meas)
> 50 GHz to 54 GHz	+10 dBm to -80 dBm	3° RMS (meas)

Leveling Modes²⁴

ALC on	Power leveling with internal temperature stabilized detector feedback loop
ALC off	Temperature compensated power control
Auto	Automatic selection of ALC on or off depending on instrument settings

22 Time from receipt of SCPI command to amplitude within 1 dB of final amplitude. For frequencies ≥ 10 MHz.

23 Power range does not exceed maximum specified power for the given frequency range. When harmonic filters are enabled (selectable with Option 1EH), power range is +10 dBm (or maximum specified power, whichever is less) to -80 dBm across the entire frequency range.

24 Power alignment is a routine that offsets initial ALC off factory calibration to be in line with local ambient temperature and provides sufficient range for ALC on leveling. It should be run at regular intervals or whenever the operating temperature changes more than ± 5 °C from the previous alignment temperature.

Spectral Purity

Harmonics²⁵, Measured Using Vector CW Signal, Temperature Range from +22 °C to +28 °C

Frequency	M9484C		V3080A	
	Standard (+10 dBm)	Option 1EH ²⁶ (+5 dBm)	Standard (-10 dBm) ²⁷	Option 1EH (-10 dBm) ²⁷
10 MHz to < 3.75 GHz	-30 dBc	-55 dBc	-30 dBc (typ)	-55 dBc (typ)
3.75 GHz to < 5.5 GHz	-30 dBc	-50 dBc ²⁸	-30 dBc (typ)	-50 dBc (typ)
5.5 GHz to < 7.25 GHz	-30 dBc	-55 dBc	-30 dBc (typ)	-55 dBc (typ)
7.25 GHz to < 15 GHz	-30 dBc ²⁸	-53 dBc	-30 dBc (typ)	-53 dBc (typ)
15 GHz to < 21.6 GHz	-55 dBc	-55 dBc	-55 dBc (typ)	-55 dBc (typ)
21.6 GHz to 27 GHz	-55 dBc ²⁸	-55 dBc ²⁸	-55 dBc (typ)	-55 dBc (typ)
> 27 GHz to 50 GHz	-	-	-55 dBc (typ)	-55 dBc (typ)

Non-Harmonics²⁹, +10 dBm or Maximum Specified Power, Whichever is Lower³⁰, Temperature Range from +22 °C to +28 °C

Frequency	M9484C		V3080A	
	> 300 Hz Offset	Line-Related (≤ 300 Hz offset)	> 300 Hz Offset	Line-Related (≤ 300 Hz Offset)
10 MHz to < 7.25 GHz	-60 dBc	-57 dBc (typ)	-60 dBc (typ)	-57 dBc (typ)
7.25 GHz to < 21.6 GHz	-50 dBc ³¹	-48 dBc (typ)	-50 dBc (typ)	-48 dBc (typ)
21.6 GHz to < 42.5 GHz	-50 dBc	-40 dBc (typ)	-50 dBc (typ)	-40 dBc (typ)
42.5 GHz to < 50 GHz	-45 dBc	-38 dBc (typ)	-45 dBc (typ)	-38 dBc (typ)
50 GHz to < 52.8 GHz	-40 dBc	-35 dBc (typ)	-40 dBc (typ)	-35 dBc (typ)
52.8 GHz to 54 GHz	-40 dBc	-35 dBc (typ)	-30 dBc (typ)	-35 dBc (typ)
> 54 GHz to < 55 GHz	-	-	-30 dBc (typ)	-35 dBc (typ)
55 GHz to < 65 GHz	-	-	-40 dBc (typ)	-35 dBc (typ)
65 GHz to < 70 GHz	-	-	-43 dBc (typ)	-35 dBc (typ)
70 GHz to < 76 GHz	-	-	-36 dBc (typ)	-35 dBc (typ)
76 GHz to < 86 GHz	-	-	-48 dBc (typ)	-35 dBc (typ)
86 GHz to < 92 GHz	-	-	-37 dBc (typ)	-35 dBc (typ)
92 GHz to < 96 GHz	-	-	-50 dBc (typ)	-35 dBc (typ)
96 GHz to 100 GHz	-	-	-35 dBc (typ)	-35 dBc (typ)

Fixed Spurs with Harmonic Filters Enabled (Selectable with Option 1EH), Unless Otherwise Stated

Frequency	Level (Constant Over Set Power Level)
DC – 1 MHz	-70 dBm (typ), present in all modes of operation
2.4 GHz	-70 dBm (typ)
3.6 GHz	-75 dBm (typ)
4.8 GHz	-75 dBm (typ)
8.4 GHz	-75 dBm (typ)
19.2 GHz	-100 dBm (typ)

Subharmonics

None

²⁵ Performance is unspecified for harmonics beyond the specified frequency range. CW signal enabled with vector modulation. Specifications may degrade when vector modulation is not used.

²⁶ Option 1EH cannot be combined with frequency options 506 or 508.

²⁷ V3080A harmonic performance includes insertion loss from Keysight 1 meter cable (V3080A-60005) or 2 meter cable (V3080A-60006). For 3 meter cable (V3080A-60007), reduce power level by 5 dB (nom).

²⁸ Standard harmonic specification applies ≤ +5 dBm between 7.25 GHz and 15 GHz. Standard harmonic specification applies ≤ 0 dBm between 21.6 GHz and 27 GHz. 1EH harmonic specification applies ≤ 0 dBm from 3.75 GHz to < 5.5 GHz and from 21.6 GHz to 27 GHz.

²⁹ Excludes **fixed spurs with harmonic filters enabled**.

³⁰ V3080A non-harmonic performance below 52.8 GHz measured at -10 dBm.

³¹ Performance may degrade in enhanced SNR mode. With harmonic filters enabled (selectable with Option 1EH), specification applies at a maximum power of +5 dBm.

Absolute SSB Phase Noise (CW in Enhanced SNR Mode at +10 dBm) (dBc/Hz) (Options ST6, 600), 22 to 28 °C, () = Typical, [] = Measured


Frequency ³²	Offset								
	1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz	100 MHz
100 MHz	-82 (-91)	-110 (-117)	-125 (-130)	-145 (-150)	-151 (-158)	-153 (-158)	-152 (-158)	-153 (-158)	-
1 GHz	-62 (-72)	-90 (-97)	-105 (-110)	-135 (-139)	-144 (-148)	-151 (-155)	-153 (-159)	-154 (-159)	-154 (-159)
2 GHz	-56 (-65)	-84 (-91)	-99 (-104)	-129 (-133)	-138 (-143)	-146 (-150)	-152 (-158)	-154 (-159)	-155 (-160)
3 GHz	-52 (-62)	-80 (-87)	-95 (-101)	-126 (-130)	-135 (-140)	-143 (-147)	-150 (-156)	-154 (-159)	-155 (-160)
6 GHz	-46 (-56)	-75 (-81)	-89 (-95)	-123 (-127)	-132 (-137)	-140 (-143)	-148 (-154)	-152 (-157)	-152 (-157)
10 GHz	-42 (-51)	-71 (-77)	-84 (-90)	-118 (-121)	-129 (-132)	-133 (-136)	-139 (-144)	-143 (-149)	-142 (-148)
20 GHz	-39 (-48)	-65 (-71)	-80 (-85)	-114 (-118)	-124 (-129)	-131 (-134)	-140 (-145)	-145 (-150)	-146 (-152)
30 GHz	-36 (-46)	-59 (-67)	-72 (-79)	-112 (-117)	-123 (-128)	-130 (-133)	-137 (-145)	-143 (-149)	-138 (-145)
40 GHz	-35 (-44)	-59 (-65)	-70 (-77)	-110 (-115)	-122 (-127)	-126 (-130)	-137 (-145)	-143 (-148)	-138 (-145)
50 GHz	-34 (-41)	-57 (-63)	-67 (-75)	-108 (-112)	-120 (-123)	-122 (-125)	-133 (-140)	-143 (-148)	-138 (-145)
60 GHz	[-32]	[-66]	[-79]	[-114]	[-123]	[-125]	[-133]	[-136]	[-137]
70 GHz	[-40]	[-64]	[-80]	[-114]	[-123]	[-124]	[-137]	[-140]	[-140]
80 GHz	[-39]	[-64]	[-78]	[-112]	[-121]	[-123]	[-135]	[-138]	[-139]
90 GHz	[-37]	[-60]	[-76]	[-109]	[-120]	[-122]	[-134]	[-139]	[-140]

Absolute SSB Phase Noise (CW in Enhanced SNR Mode at +10 dBm) (dBc/Hz) (Options ST5, 500), 22 to 28 °C, () = Typical, [] = Measured


Frequency ³²	Offset								
	1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz	100 MHz
100 MHz	-80 (-83)	-99 (-101)	-119 (-122)	-140 (-144)	-150 (-155)	-153 (-158)	-152 (-158)	-153 (-158)	-
1 GHz	-60 (-63)	-78 (-81)	-99 (-102)	-124 (-127)	-137 (-140)	-142 (-144)	-152 (-157)	-154 (-159)	-153 (-159)
2 GHz	-54 (-57)	-73 (-76)	-93 (-96)	-119 (-121)	-131 (-134)	-136 (-138)	-149 (-153)	-154 (-159)	-153 (-158)
3 GHz	-51 (-54)	-69 (-72)	-90 (-92)	-115 (-117)	-128 (-130)	-132 (-134)	-146 (-150)	-153 (-158)	-153 (-159)
6 GHz	-44 (-48)	-62 (-66)	-83 (-86)	-109 (-111)	-121 (-124)	-125 (-127)	-140 (-144)	-152 (-156)	-152 (-157)
10 GHz	-40 (-43)	-58 (-61)	-79 (-82)	-105 (-107)	-118 (-120)	-122 (-124)	-134 (-139)	-142 (-147)	-140 (-147)
20 GHz	-34 (-37)	-52 (-55)	-73 (-76)	-99 (-101)	-112 (-114)	-116 (-118)	-130 (-135)	-143 (-148)	-143 (-150)
30 GHz	-29 (-33)	-48 (-51)	-69 (-72)	-95 (-97)	-108 (-111)	-113 (-115)	-127 (-132)	-139 (-145)	-136 (-143)
40 GHz	-27 (-31)	-46 (-49)	-67 (-70)	-93 (-95)	-106 (-108)	-110 (-112)	-125 (-129)	-140 (-145)	-137 (-144)
50 GHz	-26 (-29)	-43 (-47)	-65 (-68)	-91 (-93)	-104 (-107)	-108 (-111)	-123 (-127)	-139 (-144)	-138 (-144)
60 GHz	[-28]	[-46]	[-67]	[-88]	[-92]	[-95]	[-112]	[-131]	[-137]
70 GHz	[-28]	[-43]	[-66]	[-88]	[-90]	[-94]	[-111]	[-130]	[-140]
80 GHz	[-30]	[-41]	[-65]	[-86]	[-89]	[-93]	[-110]	[-129]	[-139]
90 GHz	[-25]	[-41]	[-64]	[-85]	[-88]	[-92]	[-109]	[-128]	[-139]



³² Frequency ≤ 50 GHz is applicable for standalone M9484C only. Frequency ≥ 60 GHz is applicable for M9484C with V3080A.

Measured SSB Phase Noise (Option ST6)

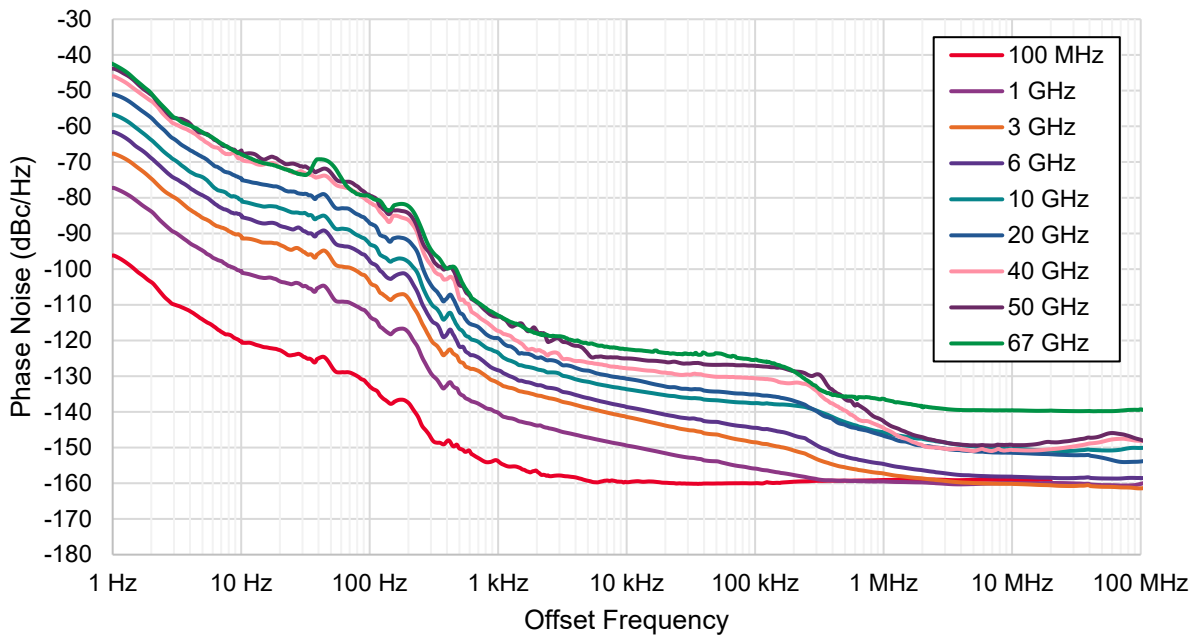


Measured SSB Phase Noise (Option ST5)

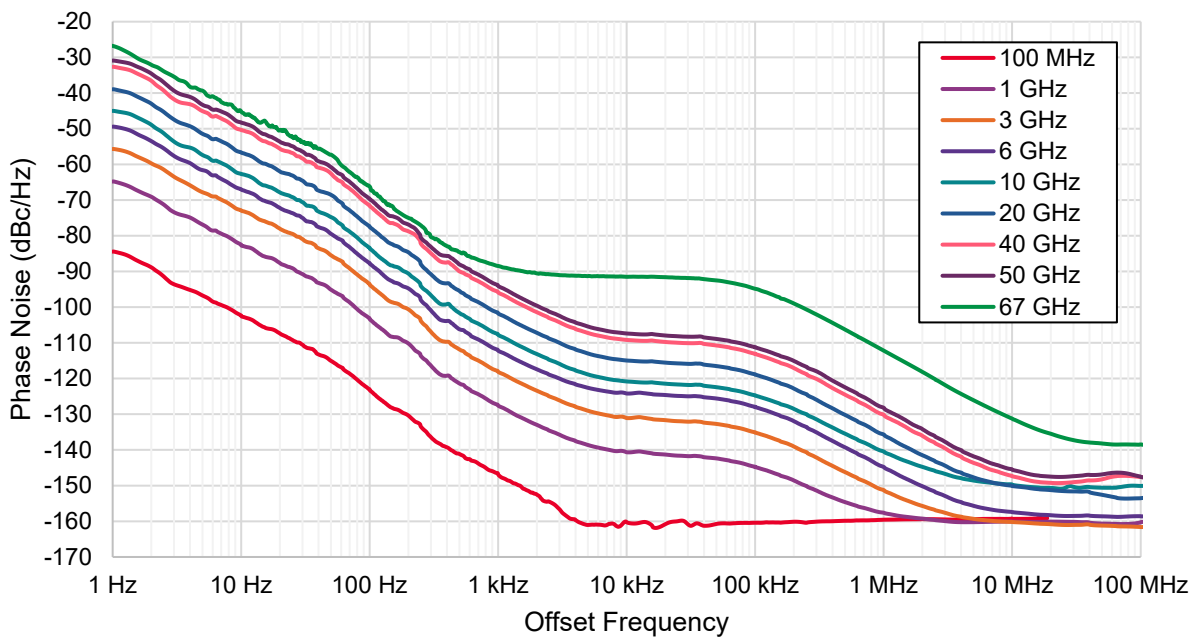

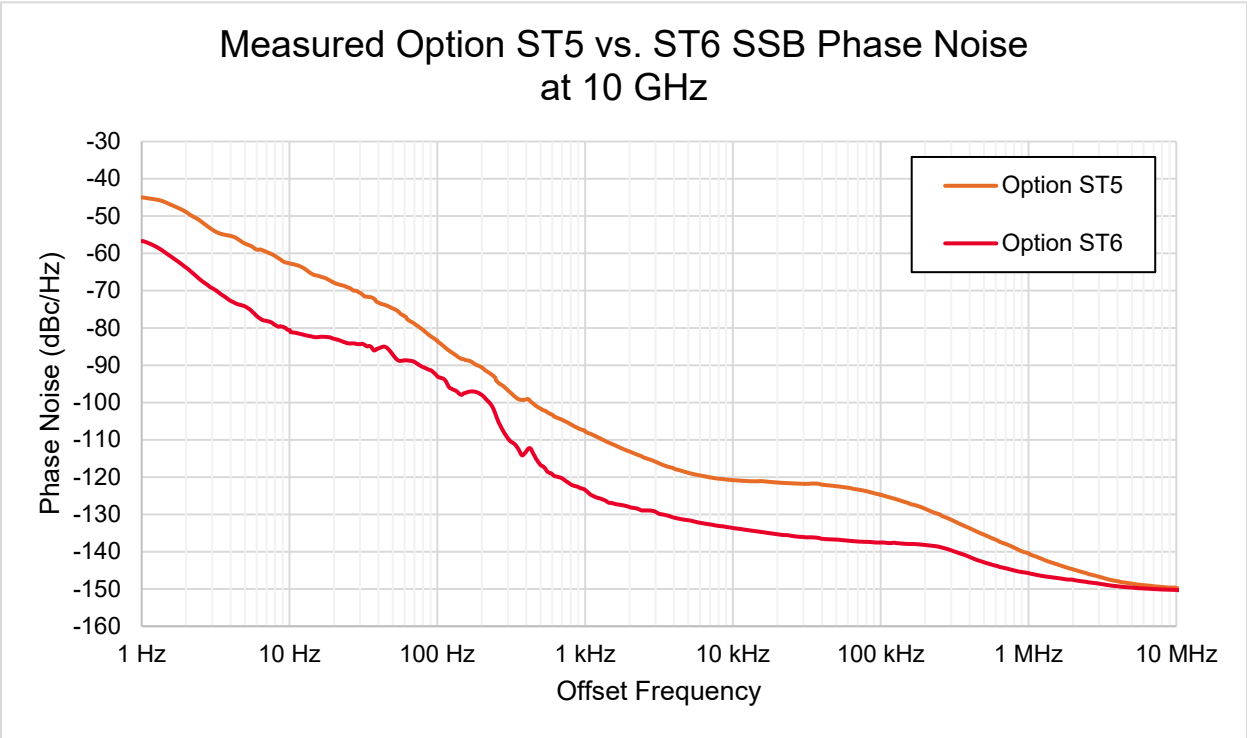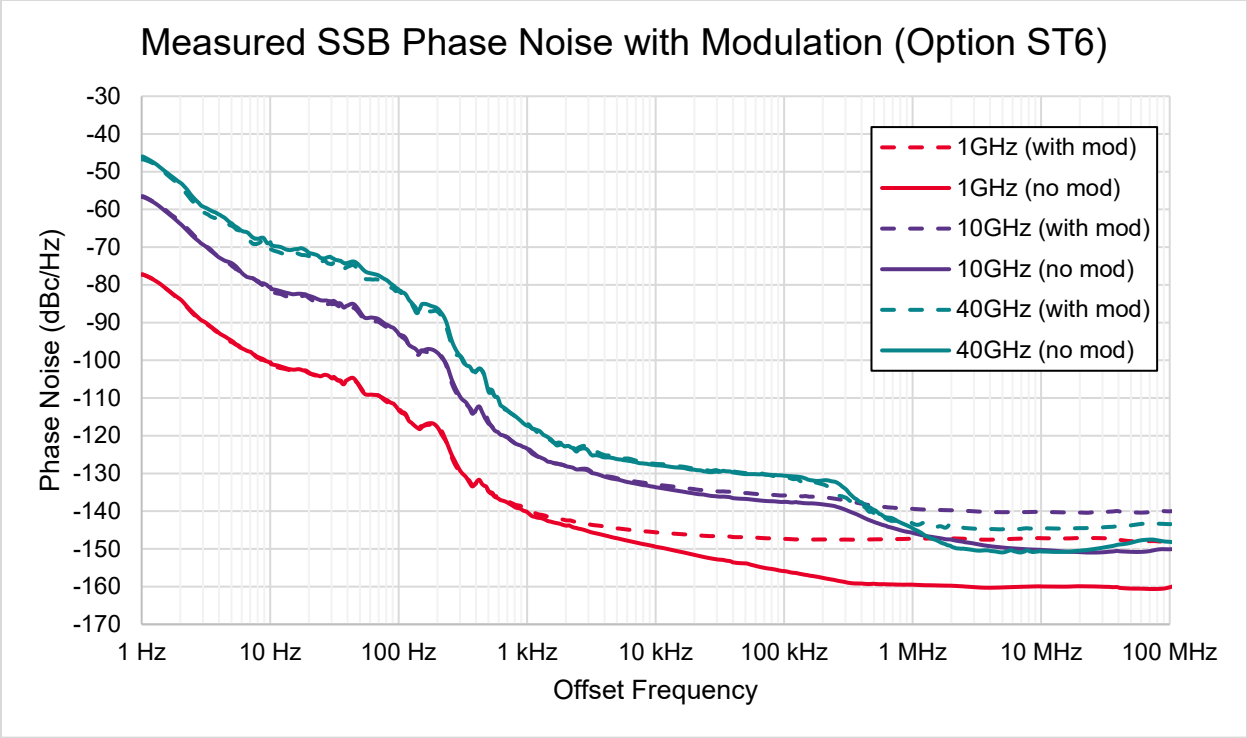

Measured Option ST5 vs. ST6 SSB Phase Noise at 60 GHz

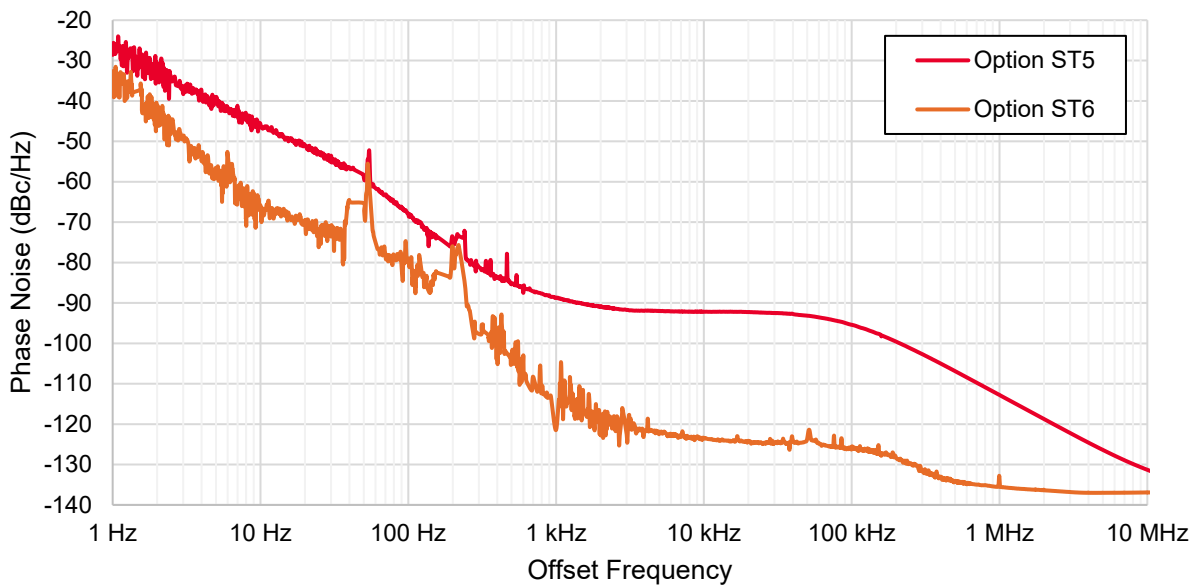

Pulse Modulation (Option PMR or PME)

Pulse Modulation³³, Temperature Range 22 to 28 °C, () = Typ


Pulse paths	Internal pulse generator		
Minimum pulse width (Tw) with duty cycle ≤ 50%, ALC on or off	Option PMR	20 ns	
	Option PME	30 ns	
On/off ratio ³⁴	100 MHz to 54 GHz	80 dB	
	> 54 GHz to 100 GHz ³⁵	(80 dB)	
Rise/fall times (Tr and Tf), ALC on or off	100 MHz to 54 GHz	10 ns (6 ns)	
	> 54 GHz to 100 GHz ³⁵	(10 ns)	
Level accuracy relative to CW	ALC state	ALC on	ALC off
	100 MHz to 20 GHz	± 0.6 dB	± 0.5 dB
	> 20 GHz to 45 GHz	± 1 dB	± 0.7 dB
	> 45 GHz to 54 GHz	± 1.5 dB	± 1 dB
	> 54 GHz to 100 GHz ³⁵	(± 1.5 dB)	(± 1 dB)
Width compression	100 MHz to 45 GHz	± 2 ns	
	> 45 GHz to 54 GHz	± 3 ns	
	> 54 GHz to 100 GHz ³⁵	(± 3 ns)	
Video feed-through (Vf)	100 MHz to < 1 GHz	< 50 mV p-p (< 25 mV p-p)	
	≥ 1 GHz to 54 GHz	< 25 mV p-p (< 12 mV p-p)	
	> 54 GHz to 100 GHz ³⁵	(< 50 mV p-p)	
Pulse overshoot	100 MHz to 45 GHz	< 10%	
	> 45 GHz to 54 GHz	< 20%	
	> 54 GHz to 100 GHz ³⁵	(< 20%)	
External pulse input	No analog pulse inputs allowed		

33 Specifications apply for center frequencies > 100 MHz. Cannot be used in combination with vector modulation.

34 On/off ratio excludes spurs.

35 Frequency > 54 GHz applies to M9484C with V3080A. For M9484C with V3080A at frequencies ≤ 54 GHz, pulse performance is nominal and cable and insertion loss of the V3080A should be considered.

- T_d video delay (variable)
- T_w video pulse width (variable)
- T_p Pulse period (variable)
- T_m RF delay
- T_{rf} RF pulse width
- T_f RF pulse fall time
- T_r RF pulse rise time
- V_{or} pulse overshoot
- V_f video feedthrough

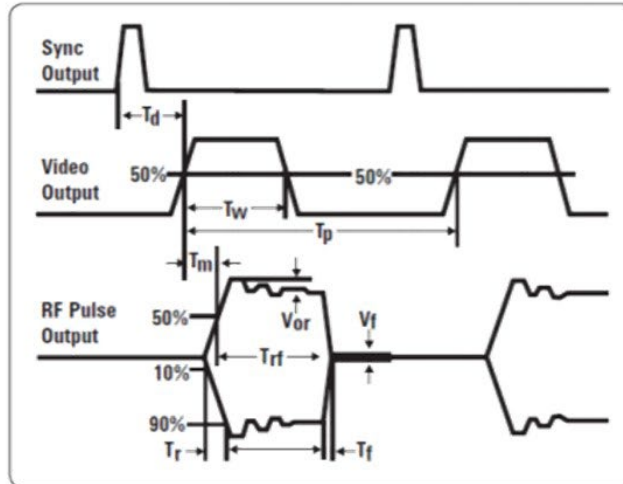

Internal Pulse Generator (Option PMR or PME)

Modes	Square, free run, pulse train (Option 320, SCPI only), adjustable doublet, triggered		
Square wave rate	(50 MHz)/k from 0.1 Hz to 25 MHz where k is an integer (nom)		
Signal routing	Pulse trigger input	Trig 1	
	Pulse sync output	Event 1	
	Pulse video output	Event 2	
		Option PMR	Option PME
Pulse period (PRI) (T_p)	Free run	30 ns to 42 s	40 ns to 42 s
	Triggered modes	4.01 μ s to 42 s	4.01 μ s to 42 s
Pulse width (T_w)		20 ns to 42 s – 10 ns	30 ns to 42 s – 10 ns
Settable delay	Free run	-42 s – 10 ns to 42s – 30 ns	-42 s – 10 ns to 42s – 40 ns
	Triggered modes	0 to 42s – 30 ns	0 to 42s – 40 ns
Sync trigger width		20 ns to 42 s – 10 ns	30 ns to 42 s – 10 ns
Pulse train generator (Option 320, SCPI only) ³⁶	Number of pulse patterns	2047	2047
	On time range	20 ns to 42 s – 10 ns	30 ns to 42 s – 10 ns
	Off time range	10 ns to 42 s – 20 ns	10 ns to 42 s – 30 ns

³⁶ Requires Option PMR or PME.

Analog I/O (Option AN1)

Option AN1 adds input and output connectors to the M9484C VXG that are otherwise not present. The capability provided by Option AN1 is described in the following section. These features may be enhanced with additional options.

Analog I/O (Option AN1)

LF Output		
Waveform	Sine	
Rate range	0.1 Hz to 10 MHz	
Resolution	0.1 Hz	
Frequency accuracy	Same as RF reference source (nom)	
LF audio output	0 to 5 V peak into 50 Ω (nom)	
	-5V to 5V digital offset	
Amplitude, Frequency, and Phase Modulation Inputs (requires Option UNT for Use)		
Paths (EXT 1, 2)	2, summed internally for composite modulation	
Input impedance	50 Ω , 600 Ω , 1 M Ω (nom)	
Input bandwidth	10 MHz (nom)	
Sensitivity	± 1 V (nom)	
Single Ended I/Q Outputs		
Single ended I/Q outputs are included with option AN1. Option DIQ may also be added to enable differential I/Q outputs. Refer to I/Q baseband output for more information.		
General Purpose Trigger/Marker Inputs/Outputs		
15 additional general purpose inputs/outputs that can be configured for use as triggers or markers. Three utilize SMB connectors. The remaining 12 are accessed with the Aux I/O port. An accessory cable to simplify interfacing with the Aux I/O port can be ordered as Y1308A.		
SMB type connectors (Trig A, B, C)	Input range	5 V
	Input impedance	50 Ω or 10 k Ω
	Output level	3.3 V
	Output impedance	50 Ω
Aux I/O	Input range	3.3 V
	Input impedance	10 k Ω
	Output level	3.3 V
	Output impedance	50 Ω

Analog Modulation

Frequency Modulation (Option UNT, ST6, 600) ^{37,38}

Modulation paths	FM Paths 1 and 2 are summed internally for composite modulation		
Maximum rate	10 MHz (nom)		
Maximum peak deviation	1.25 GHz (nom)		
Resolution	1 Hz (nom)		
Modulation source	Internal		External
Deviation accuracy, measured at 1 kHz rate with ≤ 10 MHz deviation	≤ 8.5 GHz	< 1.2% of setting + 20 Hz (typ)	< 1.5% of setting + 20 Hz (meas)
	> 8.5 GHz to 20 GHz	< 1.2% of setting + 20 Hz (typ)	< 2.0% of setting + 20 Hz (meas)
	> 20 GHz to 30 GHz	< 1.8% of setting + 20 Hz (typ)	< 2.0% of setting + 20 Hz (meas)
	> 30 GHz to 40 GHz	< 2.5% of setting + 20 Hz (typ)	< 2.5% of setting + 20 Hz (meas)
	> 40 GHz to 50 GHz	< 3.5% of setting + 20 Hz (typ)	< 4.0% of setting + 20 Hz (meas)
Distortion, measured at 1 kHz rate with ≤ 10 MHz deviation	≤ 8.5 GHz	0.05% (typ)	0.05% (meas)
	> 8.5 GHz to 20 GHz	0.05% (typ)	0.07% (meas)
	> 20 GHz	0.1 % (typ)	0.07% (meas)
Modulation frequency response, measured at 100 kHz deviation, 3 dB bandwidth	10 Hz to 10 MHz (typ)		

³⁷ Specifications apply up to 50 GHz. Analog modulation is usable above 50 GHz; however, performance is not warranted.

³⁸ Frequency and phase modulation are only available with Option UNT when ordered with Options ST6 and 600. Only amplitude modulation is available with Option UNT when ordered with Options ST5 and 500.

Phase Modulation (Option UNT, ST6, 600) ^{39,40}

Modulation paths	ΦM Paths 1 and 2 are summed internally for composite modulation		
Maximum rate	10 MHz (nom)		
Maximum peak deviation	100 rad (nom)		
Resolution	0.001 rad (nom)		
Modulation source	Internal	External ⁴¹	
Deviation accuracy, measured at 1 kHz rate with ≤ 2 rad deviation	≤ 8.5 GHz	< 0.5 % of setting + 0.01 rad (typ)	< 1.5 % of setting + 0.01 rad (meas)
	> 8.5 GHz	< 0.5 % of setting + 0.01 rad (typ)	< 2.0 % of setting + 0.01 rad (meas)
Total harmonic distortion, measured at 1 kHz rate with ≤ 2 rad deviation	≤ 8.5 GHz	0.1% (typ)	0.1% (meas)
	> 8.5 GHz	0.1% (typ)	0.2% (meas)
Modulation frequency response, measured at 3 rad deviation, 3 dB bandwidth	10 Hz to 10 MHz (typ)		

Amplitude Modulation (Option UNT)^{39,40,41}

Modulation paths	AM Paths 1 and 2 are summed internally for composite modulation		
AM depth type	Linear or logarithmic		
Maximum depth	100% linear or 40 dB logarithmic (nom)		
Depth resolution	0.1% linear or 0.01 dB logarithmic (nom)		
Modulation source	Internal	External ⁴¹	
Depth accuracy, measured at 1 kHz rate with depth ≤ 80%, ALC on	≤ 35 GHz	< 1 % of setting + 1 % (typ)	< 2 % of setting + 1 % (meas)
	> 35 GHz to 50 GHz	< 2 % of setting + 1 % (typ)	< 3 % of setting + 1 % (meas)
Total harmonic distortion, measured at 1 kHz rate, ≤ 35 GHz, ALC on, depth = 30% or 80%	0.6% (typ)		0.6% (meas)
Total harmonic distortion, measured at 1 kHz rate, > 35 GHz, ALC on, depth = 30% or 80%	0.6% (typ)		1.8% (meas)
Modulation frequency response, measured at 30% depth, 3 dB bandwidth	10 Hz to 10 MHz (typ)		

Internal Modulation Source (Option UNT)

Waveform generator	Provides signal for use with AM, FM, ΦM, or LF output ⁴²		
Waveforms	Sine, triangle, ramp up, ramp down, pulse, square		
Rate range	Sine	AM, FM, ΦM	0.01 Hz to 100 MHz (nom)
		LF output	0.01 Hz to 10 MHz (nom)
	All other waveforms	AM, FM, ΦM	0.01 Hz to 10 MHz (nom)
		LF output	0.01 Hz to 1 MHz (nom)
Resolution	0.01 Hz (nom)		
Accuracy	Same as time base		

Multifunction Generator (Option 303)

The multifunction generator option (Option 303) consists of 7 waveform generators that can be set independently with up to 5 simultaneously using the composite modulation features in AM, FM/PM plus LF out

Function generator 1	Sine, triangle, ramp up, ramp down, pulse, square
Function generator 2	Sine, triangle, ramp up, ramp down, pulse, square
Dual function generator	Sine, triangle, ramp up, ramp down, pulse, square, phase offset and amplitude ratio for Tone 2 relative to Tone 1
Swept function generator	Sawtooth, triangle
Noise generator 1	Uniform, Gaussian
Noise generator 2	Uniform, Gaussian
DC	Only for LF output ⁴²

39 Specifications apply up to 50 GHz. Analog modulation is usable above 50 GHz; however, performance is not warranted.

40 Frequency and phase modulation are only available with Option UNT when ordered with Options ST6 and 600. Only amplitude modulation is available with option UNT when ordered with Options ST5 and 500.

41 Phase modulation specifications using an external modulation source apply at power levels less than +10 dBm. AM specifications using an internal modulation source apply 6 dB below maximum specified power from 20 to 30 °C. AM distortion specifications using an external modulation source apply at power levels less than +10 dBm.

42 LF output requires Option AN1. See **LF output** for details.

Simultaneous and Composite Modulation per Channel

Simultaneous modulation	All modulation types (I/Q, AM, FM/ΦM, and pulse modulation) may be simultaneously enabled except: FM with phase modulation or pulse with I/Q modulation cannot be combined and two modulation types cannot be simultaneously generated using the same modulation source; for example, the baseband I/Q generator, AM, and FM can run concurrently and all will modulate the output RF (this is useful for simulating signal impairments).				
Composite modulation	AM, FM, and ΦM each consist of two modulation paths which are summed internally for composite modulation. Modulation can be any combination of internal sources.				
	AM	FM ⁴³	Phase ⁴³	Internal Pulse	Internal I/Q
AM	•	•	•	•	•
FM ⁴³	•	•	—	•	•
Phase ⁴³	•	—	•	•	•
Internal pulse	•	•	•	—	—
Internal I/Q	•	•	•	—	—

• = compatible, — = incompatible

I/Q Based Analog Modulation (N7642APPC)

This section describes the functionality provided by N7642APPC PathWave Signal Generation for I/Q based amplitude modulation. External inputs are not supported. See [user documentation](#) for additional details.

Amplitude Modulation

Waveform	Sine, dual-sine, triangle, ramp up, ramp down, square	
AM rate	Sine	1 Hz to (maximum baseband bandwidth / 2) ⁴⁴
	All other waveforms	1 Hz to (maximum baseband bandwidth / 16) ⁴⁴
AM depth	0 to 100%	

Frequency Modulation

Waveform	Sine, dual-sine, triangle, ramp up, ramp down, square	
FM rate	Sine	1 Hz to (maximum baseband bandwidth / 4) ⁴⁴
	All other waveforms	1 Hz to (maximum baseband bandwidth / 16) ⁴⁴
FM deviation	0 Hz to 50 MHz	

Phase Modulation

Waveform	Sine, dual-sine, triangle, ramp up, ramp down, square	
PM rate	Sine	1 Hz to (maximum baseband bandwidth / 4) ⁴⁴
	All other waveforms	1 Hz to (maximum baseband bandwidth / 16) ⁴⁴
PM deviation	0 to 10 radians	

Avionics (N7641APPC)

This section describes the functionality provided by N7641APPC PathWave Signal Generation for Avionics. See [user documentation](#) for additional details.

Type

Avionics type	VOR, ILS localizer, ILS glide slope, marker beacon
---------------	--

Operating Modes

VOR	NORM, VAR, sub-carrier, sub-carrier + FM
ILS localizer	NORM, suppress left, suppress right
ILS glide slope	NORM, suppress up, suppress down
Marker beacon	Inner, middle, outer

⁴³ FM and ΦM are available with Option ST6 and 600 only. Not compatible with Options ST5 and 500.

⁴⁴ See [RF \(I+Q\) bandwidth](#) table for available modulation bandwidth.

Vector Modulation (Options Bxx, Rxx)

Internal I/Q Baseband Generator Adjustments

Internal I and Q offset	± 20% (0.1% resolution)
Internal I/Q quadrature angle	± 20° (0.001° resolution)
Internal I/Q gain balance	± 10 dB (0.001 dB resolution)
Internal I/Q time skew	± 33.33 ns (100 fs resolution)
I/Q common delay range	0 to 16.667 ns
I/Q common delay resolution	100 fs

I/Q Baseband Output (Option AN1 and DIQ)

Type	Single ended (AN1), differential (DIQ)	
Output impedance	Single ended	50 Ω (nom)
	Differential	100 Ω (nom)
Frequency range ⁴⁵	DC to 1.2 GHz (nom) for each output (2.4 GHz composite IQ)	
Common mode I/Q offset	± 1.5 V (50 μV resolution) (meas)	
Differential mode I or Q offset	± 1.5 V (50 μV resolution) (meas)	
Single ended amplitude per port	Up to 200 MHz	1.9 Vp-p or 0.95 Vp into 50 Ω (nom)
	Up to 600 MHz	1.6 Vp-p or 0.8 Vp into 50 Ω (nom)
	Up to 1.2 GHz	1 Vp-p or 0.5 Vp into 50 Ω (nom)
SFDR without harmonics (sine)	100 MHz or 1 GHz single tone at 500 mV	-70 dBc (meas)
SFDR with harmonics (sine)	100 MHz single tone at 500 mV	-60 dBc (meas)
Noise floor	1 GHz tone at 900 mV Vpeak, 10 MHz offset, measured on I channel output	-155 dBc/Hz (meas)

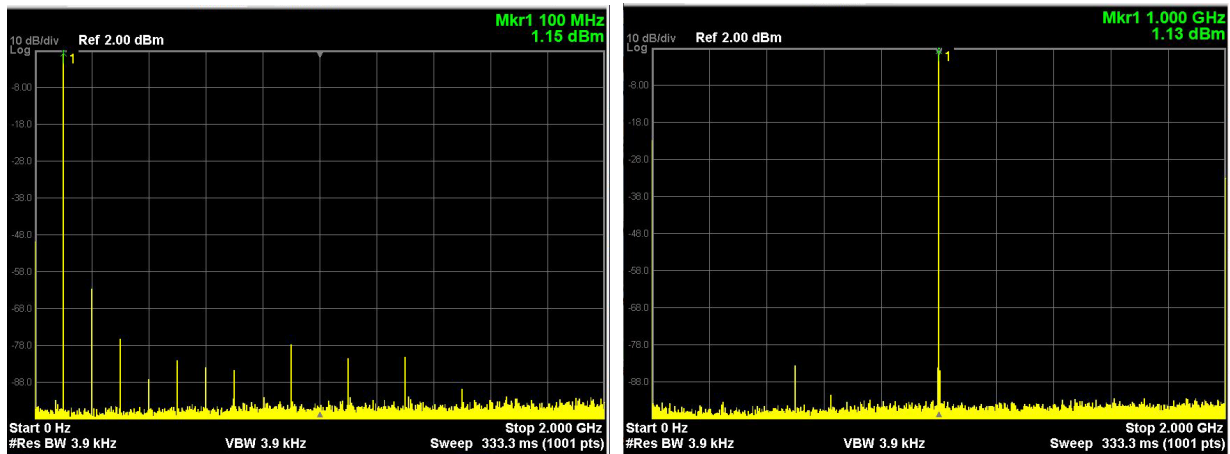


Figure 2. (Left) Measured IQ output, 100 MHz tone spectrum. (Right) Measured IQ output, 1 GHz tone spectrum.

⁴⁵ Maximum frequency may be limited depending on selected modulation bandwidth Option (Bxx, Rxx). See [RF \(I + Q\) bandwidth and sample rate section](#) for details.

Internal Real-Time Complex Digital I/Q Filters

Factory channel corrections – corrects the linear phase and amplitude response of the RF outputs of the signal generator using factory calibration arrays.

Carrier Leakage

None (direct digital modulation, no IQ modulator)

Frequency Response Over Available Modulation Bandwidth⁴⁶

Center Frequency	M9484C		V3080A ⁴⁷	
	Amplitude	Phase	Amplitude	Phase
400 MHz to 21.6 GHz	±0.25 dB (meas)	±5° (meas)	±0.25 dB (meas)	±5° (meas)
> 21.6 GHz to 35 GHz	±0.25 dB (meas)	±5° (meas)	±0.25 dB (meas)	±5° (meas)
> 35 GHz to 52.8 GHz	±0.5 dB (meas)	±10° (meas)	±1.0 dB (meas)	±10° (meas)
> 52.8 GHz to 54 GHz	±0.5 dB (meas)	±10° (meas)	±0.6 dB (meas)	±5° (meas)
> 54 GHz to 70 GHz	-	-	±0.5 dB (meas)	±10° (meas)
> 70 GHz to 100 GHz	-	-	±1.0 dB (meas)	±10° (meas)

User Defined Automatic Channel Response Correction and S-Parameter De-Embedding (N7653APPC)

Methods for Fixture Error Removal

Scatter parameters de-embedding/embedding files generated by a network analyzer or simulation

Automatic channel response correction using a power sensor or spectrum analyzer (amplitude and phase correction)

Scaler user flatness (absolute power correction)

Scatter Parameters

File format	.s2p, .csv
Number of cascadeable calibration sets	4

Automated Channel Response Correction (512 Taps)⁴⁸

Recommended maximum amplitude for error correction	± 5 dB across modulation bandwidth
--	------------------------------------

User Flatness

File format	.uflat, .csv
Entry modes	USB or LAN direct power meter control

Instrument Nonlinear Correction (N7653APPC)

Improve the characteristics of the generated signal by digitally predistorting the waveform to reduce distortion components.

⁴⁶ See **RF (I+Q) bandwidth** table for available modulation bandwidth.

⁴⁷ V3080A performance applies after an **RF channel flatness adjustment** completed using an N9042B UXA signal analyzer and V3050A signal analyzer frequency extender. For frequencies ≤ 52.8 GHz, measured at power levels between -15 dBm and -25 dBm. For frequencies > 52.8 GHz, measured at power levels between -10 dBm and -20 dBm.

⁴⁸ Automated routine uses power sensor to correct for linear amplitude response of DUT (equalizer). See **User Documentation** for more details.

Internal Baseband Generator (Options Bxx, Rxx)

Definitions

Channel or port	The number of physical RF outputs
Signal ⁴⁹	By default, each channel can generate one signal (ex: one waveform file). When option 8SG is included, each channel can generate up to 8 signals, which are summed and played out of the single RF output.
Group	A group can contain 1 to 8 signals assigned to a channel

Internal Baseband Generator (Options Bxx, Rxx)

I/Q file resolution	16 bits
Waveform granularity	1 sample
Frequency offset	± half of maximum baseband bandwidth
Signal attenuation	0 to -100 dB
Sample rate resolution	10 µHz
Interpolated I/Q rate	Fixed 3 GHz

RF (I + Q) Bandwidth⁵⁰ and Sample Rate

Option	RF (I + Q) Bandwidth (nom)	Sample Rate (nom)
Option B1X	160 MHz	200 MSa/s
Option B2X	250 MHz	300 MSa/s
Option B5X	500 MHz	600 MSa/s
Option R10	1 GHz	1.2 GS/s
Option R25	2.5 GHz	3 GS/s

RF (I + Q) Bandwidth⁵⁰ and Sample Rate, Limited Options

Option	Option R1E		Option R2E	
	RF (I + Q) Bandwidth (Nom)	Sample Rate (nom)	RF (I + Q) Bandwidth (Nom)	Sample Rate (Nom)
9 kHz to ≤ 5.75 GHz	1 GHz	1.2 GS/s	2.5 GHz	3 GS/s
> 5.75 GHz to ≤ 31.25 GHz	1 GHz	1.2 GS/s	2.2 GHz	3 GS/s
> 31.25 GHz to ≤ 31.838 GHz	1 GHz	1.2 GS/s	1 GHz	3 GS/s
> 31.838 GHz to < 36.962 GHz	550 MHz	1.2 GS/s	550 MHz	3 GS/s
36.962 GHz to < 37.55 GHz	1 GHz	1.2 GS/s	1 GHz	3 GS/s
37.55 GHz to 54 GHz	1 GHz	1.2 GS/s	2.2 GHz	3 GS/s
> 54 GHz to < 89.05 GHz ⁵¹	1 GHz	1.2 GS/s	2.2 GHz	3 GS/s
89.05 GHz to 110 GHz ⁵¹	1 GHz	1.2 GS/s	2.5 GHz	3 GS/s

Channel Bonding (Option CB5)

Using an external combiner⁵², bond 2 or 4 channels to play waveform files with a maximum bandwidth of 5 or 10 GHz. Requires a multi-channel M9484C with option PCH, Option R25 on each channel, N7653APPC PathWave Signal Generation, and a supported receiver to perform the necessary alignment. See [User Documentation](#) for details.

Arbitrary Waveform Memory

Maximum arbitrary waveform playback memory	Standard with Option B1X or B2X	64 MSa
	Standard with Option B5X, R10, R1E, R25, or R2E	256 MSa
	Option M05	512 MSa
	Option M10	1024 MSa
	Option M20	2048 MSa
	Option M40	4096 MSa
Maximum storage capacity including other user data	32 GB shared with operating systems (nom)	

⁴⁹ When AWGN or CW Interferer are enabled, Option 8SG provides 7 signals.

⁵⁰ RF (I+Q) bandwidth may be limited when harmonic filters are enabled (selectable with Option 1EH). Lower edge of modulated signal is not recommended to extend below 10 MHz. Upper edge of modulated signal is not recommended to extend above 8.5 GHz (Option 508), 21 GHz (Option 520), or 54 GHz (Option 554).

⁵¹ Frequency range is valid for M9484C with V3080A.

⁵² Available as accessory kits Y1166A and Y1167A. See [Configuration Guide](#) for details.

Waveform Segments

Segment length	512 samples ⁵³ to maximum arbitrary waveform playback memory
Memory allocation blocking factor	256 samples

Waveform Sequences

Maximum number of segments per sequence ⁵⁴	65,280
Maximum number of repetitions	2 ³² -1

Triggers

Trigger types	Continuous, single				
Trigger sources	Trigger key, external, bus (LAN, GPIB), global trigger (Option PCH), timer, date/time (Option PCH)				
Trigger modes	<table border="1"> <tr> <td>Continuous</td> <td>Free run, trigger and run, reset and run</td> </tr> <tr> <td>Single</td> <td>Buffered trigger, no retrigger, restart on trigger</td> </tr> </table>	Continuous	Free run, trigger and run, reset and run	Single	Buffered trigger, no retrigger, restart on trigger
Continuous	Free run, trigger and run, reset and run				
Single	Buffered trigger, no retrigger, restart on trigger				
Trigger features	External trigger playback synchronization				
Trigger delay range	0 to 41 s				
Trigger delay resolution	333 ps				
I/Q delay range	See Internal I/Q baseband generator adjustments section				
I/Q delay resolution	See Internal I/Q baseband generator adjustments section				
Trigger jitter	± 1.67 ns (1/300 MHz clock rate)				
Trigger latency ⁵⁵	<table border="1"> <tr> <td>Reset and run, single restart on trigger</td> <td>4 us (nom) to stop, 37 μs (nom) to start of playback for sample rates > 1.7 MSa/s⁵⁶</td> </tr> <tr> <td>All other trigger modes</td> <td>4 μs (nom)</td> </tr> </table>	Reset and run, single restart on trigger	4 us (nom) to stop, 37 μs (nom) to start of playback for sample rates > 1.7 MSa/s ⁵⁶	All other trigger modes	4 μs (nom)
Reset and run, single restart on trigger	4 us (nom) to stop, 37 μs (nom) to start of playback for sample rates > 1.7 MSa/s ⁵⁶				
All other trigger modes	4 μs (nom)				
Date/time trigger	Hardware assisted time via PPS input (Opt 1ER and PCH) can be enabled to provide within 10 ns (nom) correction to the current date/time. Without hardware assist, based on NTP for millisecond timing accuracy. See User Documentation for details.				

Multi-Channel Baseband Synchronization Primary/Secondary (Option PCH and SNC⁵⁷)

Global trigger delay range	0 to 41 s
Global trigger delay resolution	333 ps
Global trigger jitter	± 10 ns (nom) relative to asynchronous external system trigger event
Global trigger channel-to-channel relative trigger repeatability	After synchronization alignment, all channels will start on the same clock edge. See User Documentation for synchronization alignment details.

Markers

Markers are defined in a segment during the waveform generation process. Markers can be routed to the external outputs. See [User's Documentation](#) for more information.

Marker polarity	Positive
Number of markers	4
Marker routing	Event 1-3, Trig 1-3, Trig A-C, AIO 1-12 via aux connector
Marker to waveform jitter (event outputs)	< 52 ps (nom) (sample rate is a submultiple of 3 GHz)
Marker to waveform jitter (trigger outputs)	< 333 ps (nom) (sample rate is not a submultiple of 3 GHz)
Marker edge update rate	1.67 ns
Marker combining (Option 8SG)	Multiple markers can be combined on one output connector via an OR operation

⁵³ Waveforms with fewer samples will be repeated or extended as selected.

⁵⁴ Sequence memory is shared with all signals on a channel. The consumption is non-uniform based on size of waveforms, trigger type, and nested sequences.

⁵⁵ Trigger latency may increase when using global trigger as the trigger source. Contact Keysight for details.

⁵⁶ Contact Keysight for sample rates ≤ 1.7 MSa/s

⁵⁷ Option SNC requires Option PCH on all M9484Cs and appropriate cabling of LOs and trigger lines between M9484Cs to achieve results, taking fanout limitations into consideration.

AWGN (Option 403)

Type	Real-time	
Modes of operation	Standalone signal ⁵⁸ or digitally added to signals ⁵⁹	
Bandwidth	1.6 Hz to maximum baseband bandwidth, 0.8 Hz resolution	
Crest factor	Standalone signal	21.8 dB (nom)
	Digitally added to signals	18.5 dB (nom)
Randomness	Standalone signal	6 hours
	Digitally added to signals	194 years at 2.5 GHz bandwidth
Carrier-to-noise ratio	± 100 dB when added to signal	
Carrier-to-noise ratio formats	C/N, Eb/No	

CW Interferer (Option 403)

Type	Real-time	
Modes of operation ⁶⁰	Standalone signal or digitally added to signals	
Power control	Absolute, relative to signal power	
Frequency offset	\pm half of maximum baseband bandwidth ⁶¹	

Single Tone, Multitone and Noise Power Ratio (NPR) (N7621APPC)

Type	Arbitrary waveform file	
Number of tones	Multitone mode	2 to 200,001
	Single tone mode ⁶²	1
Tone spacing	100 Hz to Floor [(maximum baseband bandwidth ⁶¹)/((number of tones) - 1)/100] * 100	
Phase distribution	Random, constant, parabolic	
Number of notches	0 to 20	
Corrections ⁶³	In-band and out-of-band pre-distortion for intermodulation distortion (IMD) products or adjacent channel power ratio (ACPR), including flatness correction	

Eight Virtual Signal Generators (Option 8SG)

Combined signal sample rate	≤ 3 GSa/s	
Combined signal bandwidth	\leq maximum baseband bandwidth ⁶¹	
Individual signal sample rate	\leq maximum sample rate ⁶¹	
Individual signal frequency offset	\pm half of maximum baseband bandwidth ⁶¹	
Individual signal phase offset	$\pm 360^\circ$	
Individual signal attenuation	0 to -100 dB	

Optical Digital I/Q Streaming Inputs (Option DS1)

Lane rate	14.1 Gbps or 12.5 Gbps	
Payload format (VITA-49)	16-bit IQ data, no marker data	
	14-bit IQ data, 2-bit marker data	
	24-bit IQ data, 8-bit marker data	
Number of streams	Without eight virtual signal generators (Option 8SG)	1
	With eight virtual signal generators (Option 8SG)	1 to 8
Sample rate	100 Hz to maximum sample rate ⁶¹	

Custom Fading (N7605APPC and F9860400A) ⁶⁴

Generate signals with custom fading for receiver testing using *.tdlx files exported from the Keysight Channel Studio tapped delay line (TDL) modeling tool to configure parameters.		
Power delay profiles	up to 24 paths	
Amplitude distributions	Constant phase, Raleigh, Rice	
Doppler profiles	Pure doppler, Jakes, Flat, Rounded	
MIMO	Up to 8x8, Low/Medium/Medium-A/High-correlation	

58 With Option 8SG, each of the 8 signals can support independently tunable AWGN.

59 When AWGN is enabled, Option 8SG provides 7 signals.

60 When CW interferer is enabled, Option 8SG provides 7 signals.

61 For maximum baseband bandwidth and sample rate, see [RF \(I+Q\) bandwidth and sample rate](#).

62 Single tone generates a single CW tone at a specified offset to the channel's RF frequency.

63 Correction requires signal analyzer. See [User Documentation](#) for details.

64 See [User Documentation](#) for additional details.

3GPP MIMO Fading (5G NR FR1 & FR2, LTE) (N7605AP0C)⁶⁴

M9484C Configuration	MIMO Order (User Selectable)	
	Without Eight Virtual Signal Generators (Option 8SG)	With Eight Virtual Signal Generators (Option 8SG)
One channel (001)	1x1	1x1, 2x1, 4x1, 8x1
Two channels (002, PCH)	1x1, 1x2	1x1, 1x2, 2x1, 2x2, 4x1, 4x2, 8x1, 8x2
Four channels (004, PCH)	1x1, 1x2, 1x4	1x1, 1x2, 1x4, 2x1, 2x2, 2x4, 4x1, 4x2, 4x4, 8x1, 8x2, 8x4
Eight channels (SNC)	1x1, 1x2, 1x4, 1x8	1x1, 1x2, 1x4, 1x8, 2x1, 2x2, 2x4, 2x8, 4x1, 4x2, 4x4, 4x8, 8x1, 8x2, 8x4, 8x8
Supported Channel Models		
5G	Static, TDLA10/30, TDLB100, TDLC300, TDL10/30, UL Timing Scenario X/Y/Z, HST Scenario 1/3/4	
LTE	Static, EPA1/5, EVA5/70, ETU1/5/70/200/300/600, UL Timing Scenario 1/2, HST Scenario 1/3	

GNSS (N7609APPC)⁶⁵

Create validated real-time signals that simulate satellites from the US Global Positioning System (GPS). Requires option for 500 MHz RF bandwidth or greater. See [Technical Overview](#) for details.

Signal Descriptor Word Streaming (Including Pulse Descriptor Word (PDW))⁶⁶

Option SDW	SDW option enables agile control of frequency, amplitude, phase, time, and waveform inside the instantaneous bandwidth of the baseband. Each SDW (PDW) will address an IQ waveform segment or create the IQ in real time, including pulse modulation. Channel flatness correction is available in SDW-only mode. The SDW packets can be streamed from a file or over LAN for dynamic long duration scenarios.
------------	---

Virtual Channels


Enables the simultaneous stream of SDW channels within IF bandwidth

Option 2CH	Enables up to 2 simultaneous SDW streams
Option 4CH	Enables up to 4 simultaneous SDW streams
Option 8CH	Enables up to 8 simultaneous SDW streams

Agile RF (ARF) Operating Mode (requires Option SDW)

ARF enables the Agile RF SDW launch mode, unique from the SDW and Normal launch modes. ARF works with SDW to enable agile control of frequency, amplitude, phase, time, and waveform from 9 kHz to 20 GHz. In an M9484C with frequency range Option 532, 544, or 554, ARF mode is limited to 20 GHz maximum frequency. Depending upon application requirements, option 1EH can be beneficial when used with ARF. If Option ARF is ordered as an upgrade to an existing instrument, calibration & adjustment may be required at the time upgrade. See [Configuration Guide](#) for details.

Parameter	Definition	Frequency	Harmonic Filter State (Selectable with Option 1EH)	
			Enabled	Disabled
ARF Mode Frequency Switching Speed	Minimum time between the end of the last SDW and start of the next SDW, settled to within 0.1 rad.	< 7.25 GHz	1.45 μ s (meas)	320 ns (meas)
		\geq 7.25 GHz	320 ns (meas)	
ARF Mode Amplitude Switching Speed	Minimum time between the end of the last SDW and start of the next SDW, settled to within 1 dB.	< 7.25 GHz	1.45 μ s (meas)	210 ns (meas)
		\geq 7.25 GHz	210 ns (meas)	
ARF Mode Update Rate	Sustainable SDW throughput. Note: 942 samples required between SDWs.		800 ns	

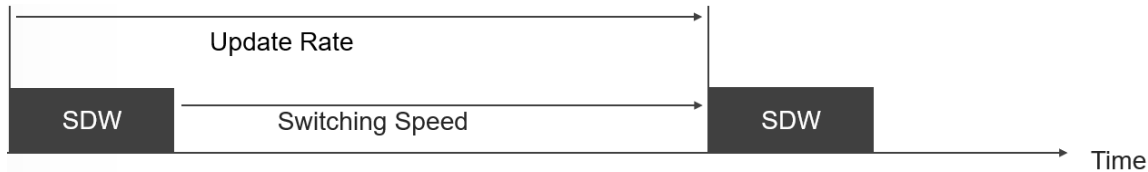

⁶⁵ See [User Documentation](#) for additional details.

⁶⁶ Signal Descriptor Word Streaming (SDW), Agile RF (ARF) mode and virtual channel Options (2CH, 4CH, and 8CH) are controlled for export under the International Traffic in Arms Regulations (ITAR). A license from the U.S. Department of State is required prior to the export of these options from the United States.

Multi-instrument Synchronization (Option SNC)

Multi-Instrument Synchronization Mechanism

Basic Multi-Instrument Synchronization	
Number of endpoints	Up to 8
Instrument configuration	Any configuration combination, see multi-instrument synchronization configurations for details and limitations
Operating modes	With leader, independent

Multi-Instrument Synchronization Configurations

The leader instrument must be able to supply the required inputs to each follower. For configurations where the number of required follower inputs exceeds the available leader outputs, a power splitter or distribution amplifier may be required. See [Startup Guide](#) for input/output power level requirements.

Basic Multi-Instrument Synchronization						
Hardware Configuration		Number of Available Outputs as a Leader			Number of Required Inputs as a Follower	
Number of Channels	Maximum Frequency	Endpoints	19.2 GHz	2.4 GHz	19.2 GHz	2.4 GHz
1 (Opt. 001)	6 GHz or 8.5 GHz (Opt. 506 or 508)	1	3	0	1	0
	14 GHz or 20 GHz (Opt. 514 or 520)	1	1	1	1	1
	31.8 GHz, 44 GHz, or 54 GHz (Opt. 532, 544, or 554)	1	1	1	1	1
	31.8 GHz, 44 GHz, or 54 GHz (Opt. 532, 544, or 554) with one V3080A	1	1	1	1	1
2 (Opt. 001 and 002)	6 GHz or 8.5 GHz (Opt. 506 or 508)	2	2	0	2	0
	14 GHz or 20 GHz (Opt. 514 or 520)	2	1	1	1	1
	31.8 GHz, 44 GHz, or 54 GHz (Opt. 532, 544, or 554)	1	1	1	1	1
	31.8 GHz, 44 GHz, or 54 GHz (Opt. 532, 544, or 554) with one V3080A	1	1	1	1	1
	31.8 GHz, 44 GHz, or 54 GHz (Opt. 532, 544, or 554) with two V3080As	1	1	1	1	1
4 (Opt. 001, 002, 003, and 004)	6 GHz or 8.5 GHz (Opt. 506 or 508)	1	2	0	1	0
	14 GHz or 20 GHz (Opt. 514 or 520)	1	1	1	1	1

Error Vector Magnitude (EVM)⁶⁷

EVM for 5G NR FR1 Bands, -10 dBm to +5 dBm, Option ST6


Frequency	100 MHz, DL, 256QAM, 30 kHz SCS
2 GHz	0.13% (meas)
4.5 GHz	0.18% (meas)

EVM for 5G NR FR2 Bands and IFs, -10 dBm to +5 dBm, Option ST6

Frequency	100 MHz, UL, 64QAM, 120 kHz SCS	400 MHz, UL, 64QAM, 120 kHz SCS
10 GHz	0.30% (meas)	0.40% (meas)
12 GHz	0.31% (meas)	0.40% (meas)
24 GHz	0.28% (meas)	0.35% (meas)
28 GHz	0.27% (meas)	0.36% (meas)
39 GHz	0.47% (meas)	0.55% (meas)
42 GHz	0.55% (meas)	0.63% (meas)
70 GHz ⁶⁸	1.07% (meas)	1.23% (meas)

EVM for WLAN, -10 dBm to +5 dBm, Option ST6


Frequency	802.11be, 320 MHz, MCS13, 300 μ s, Ch Estimation Seq Only
7 GHz	-52 dB (meas)

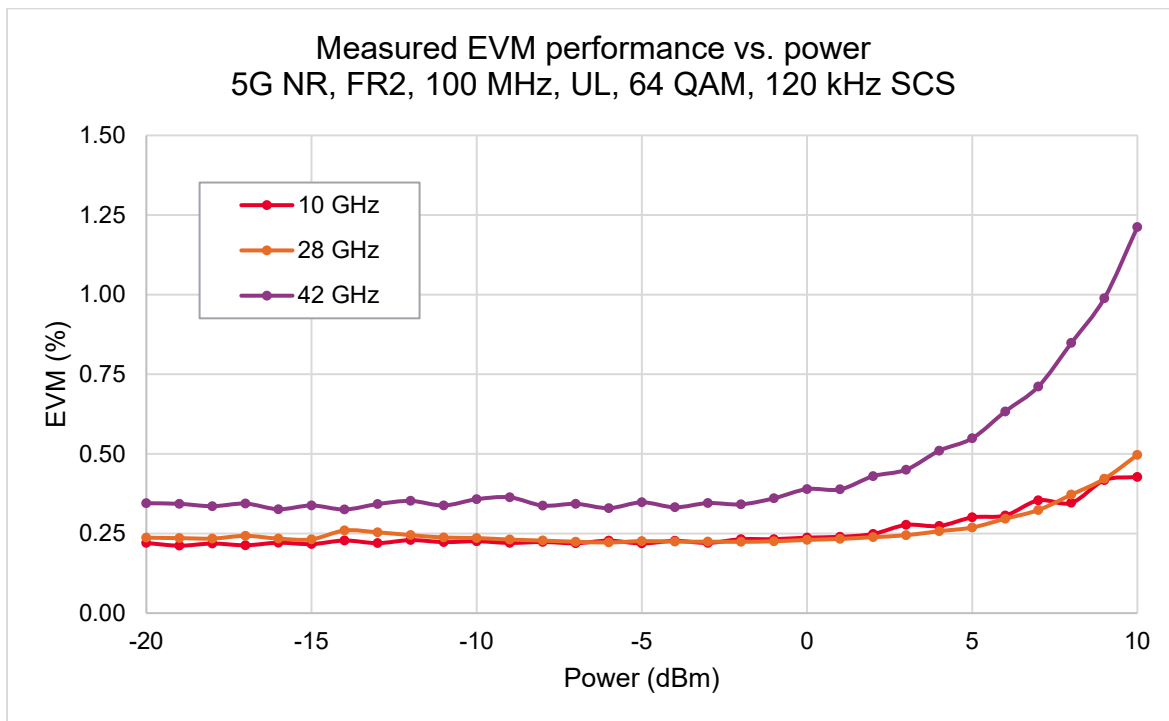


⁶⁷ Unless otherwise stated, IQNC technique has been applied to minimize receiver noise contribution.

⁶⁸ Valid for M9484C with V3080A from -25 dBm to -10 dBm, using cross-correlated EVM measurement technique.


Measured EVM performance vs. frequency
5G NR, FR2, 100 MHz, UL, 64 QAM, 120 kHz SCS

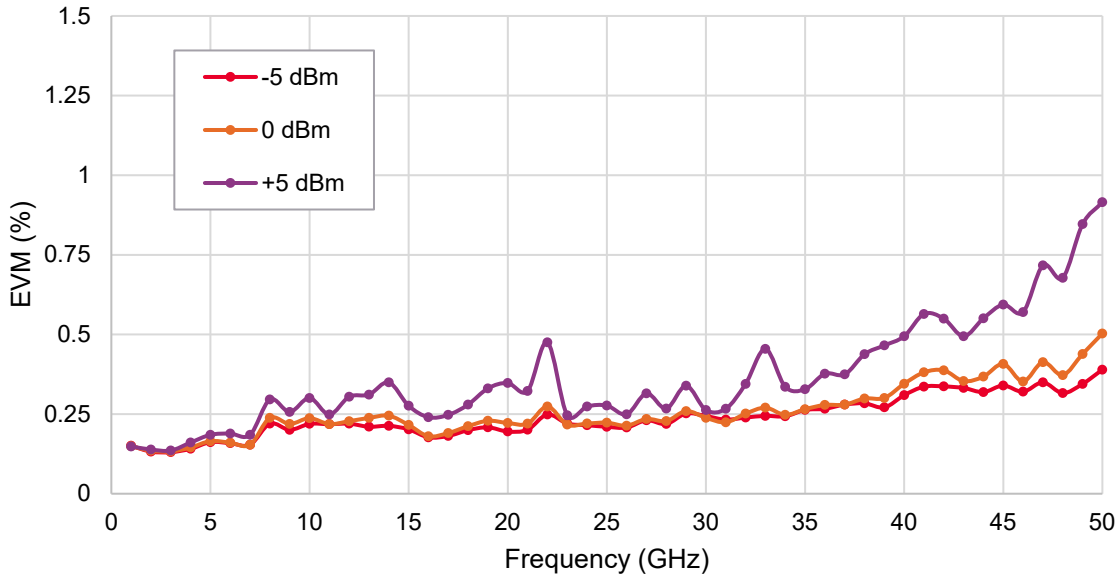


Measured ccEVM performance vs. power with V3080A
5G NR, 100 MHz, 64 QAM, 60 kHz SCS (Option ST6, AL2)

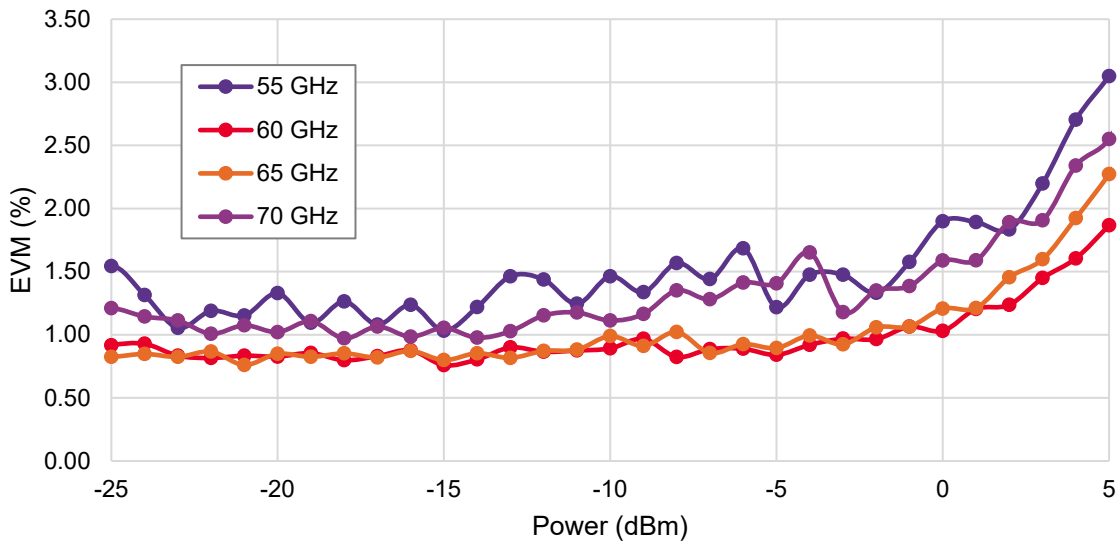

Measured ccEVM performance vs. frequency with V3080A
 5G NR, 100 MHz, 64 QAM, 120 kHz SCS (Option ST6, AL2)

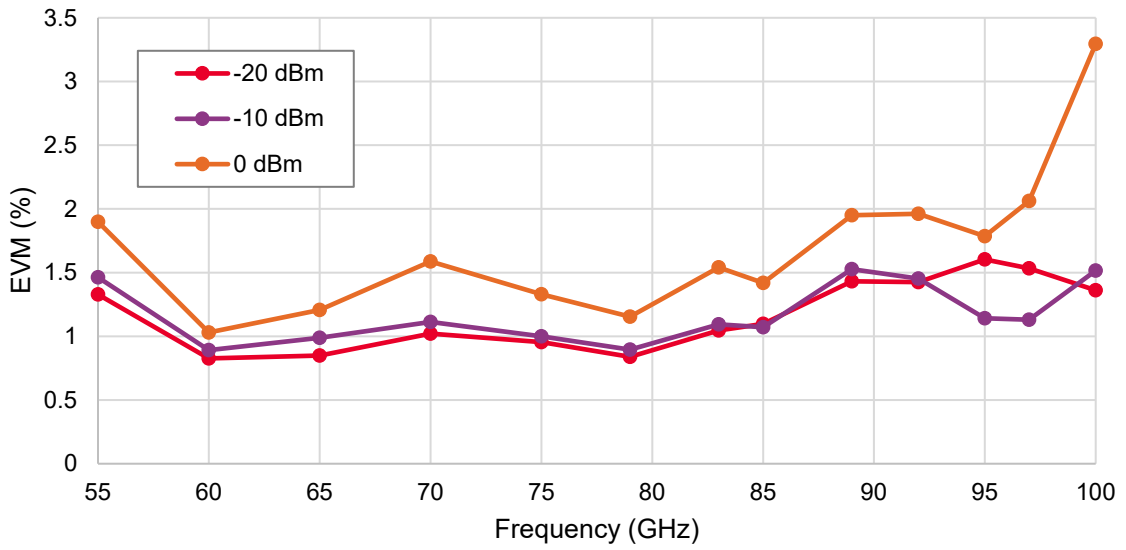

Measured EVM performance vs. power
 WLAN 802.11be, 320 MHz, MCS13, 300 μs
 Ch Estimation Seq Only

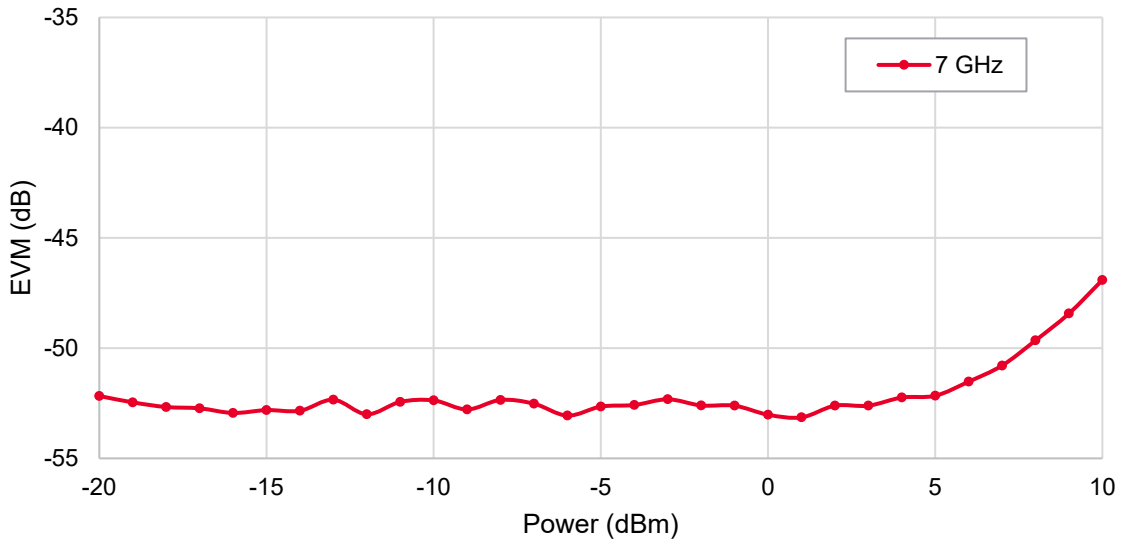

Distortion Performance (Adjacent Channel Power Ratio)

3GPP LTE-FDD Distortion Performance, -10 dBm to +5 dBm⁶⁹, () = typ


10 MHz E-TM 1.1 QPSK			
Frequency	Offset ⁷⁰	Options 506, 508	Options 514, 520, 532, 544, 554
1800 to 2200 MHz	Adjacent (10 MHz)	-64 dBc (-68 dBc)	-63 dBc (-67 dBc)
	Alternate (20 MHz)	-65 dBc (-68 dBc)	-63 dBc (-67 dBc)

5G NR FR1 Bands Distortion Performance, -10 dBm to +5 dBm, Options 506, 508, 514, 520

Frequency	100 MHz, 256QAM, 120 kHz SCS, NRB = 135
3.4 GHz	-56 dBc (meas)

5G NR FR2 Bands and IFs Distortion Performance, -10 dBm to +5 dBm

Frequency	100 MHz, 256QAM, 120 kHz SCS, NRB = 66	400 MHz, 256QAM, 120 kHz SCS, NRB = 264	8cc x 100 MHz (800 MHz), 256QAM, 120 kHz SCS, NRB = 66	14cc x 100 MHz (1.4 GHz), 256QAM, 60 kHz SCS, NRB = 66
9 GHz to 20 GHz	-56 dBc (typ)	-51 dBc (typ)	-48 dBc (typ)	-45 dBc (typ)
> 20 GHz to 30 GHz	-51 dBc (typ)	-46 dBc (typ)	-45 dBc (typ)	-41 dBc (typ)
> 30 GHz to 50 GHz	-50 dBc (typ) ⁷¹	-43 dBc (typ) ⁷¹	-42 dBc (typ) ⁷¹	-38 dBc (typ) ⁷¹
> 50 GHz to < 52.8 GHz	-46 dBc (typ) ⁷²	-41 dBc (typ) ⁷²	-38 dBc (typ) ⁷²	-35 dBc (typ) ⁷²
52.8 GHz to 71 GHz ⁷³	-43 dBc (typ)	-40 dBc (typ)	-36 dBc (typ)	n/a

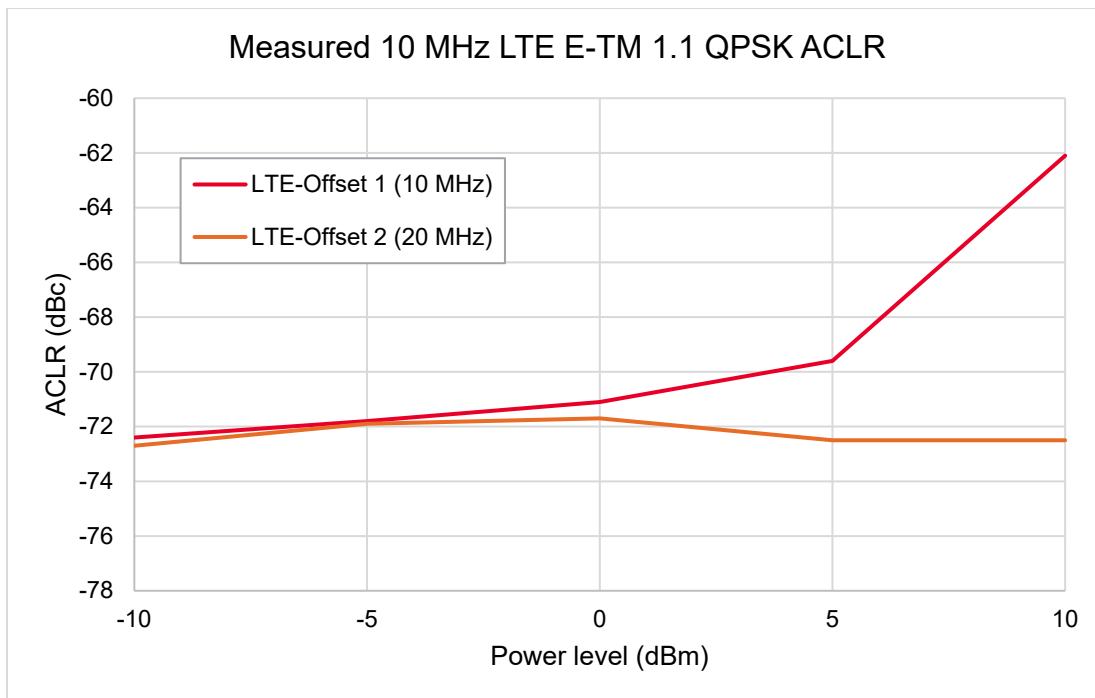

69 This is rms power. Convert from rms to peak envelope power with the following equation: PEP = rms power + crest factor (for example, 3GPP test model 1 with 64 DPCH has a crest factor 11.5 dB, therefore at +5 dBm rms, the PEP = 5 dBm + 11.5 dB = +16.5 dBm PEP).

70 ACPR measurement configuration: reference channel integration BW: 9.015 MHz, offset channel integration bandwidth: 9.015 MHz.

71 Valid over power range from -5 dBm to +5 dBm.

72 Valid over power range from -10 dBm to 0 dBm.

73 Frequency range valid for M9484C with V3080A.

Remote Programming

Remote Programming

Interfaces	GPIB (IEEE-488.2,1987) with listen and talk, and 1000BaseT LAN interface
Control languages	SCPI version 1999.0
IEEE-488 functions	SH1, AH1, T6, TE0, L4, LE0, SR1, RL1, PP0, DC1, DT0, C0, E2
Keysight IO libraries	Keysight's IO Library Suite helps you quickly establish an error-free connection between your PC and instruments – regardless of the vendor. It provides robust instrument control and works with the software development environment you choose.

General Specifications

Environmental Specifications and Regulatory Compliance (Nom)

Temperature	Operating	0 to 50 °C
	Storage	-40 to +70 °C
Type tested maximum relative humidity		95% RH up to 40 °C, decreases linearly to 57% RH at 50 °C ⁷⁴
Altitude	Operating	3,000 m (Up to 10,000 feet approx.)
	Storage	4,572 m (Up to 15,000 feet)
EMC		Complies with the essential requirements of the European EMC Directive and the UK Electromagnetic Compatibility Regulations 2016 as well as current editions of the following standards (dates and editions are cited in the Declaration of Conformity): – IEC/EN 61326-1 – CISPR Pub 11 Group 1, class A – AS/NZS CISPR 11 – CSA ICES/NMB-001(A) This ISM device complies with Canadian ICES-001. Cet appareil ISM est conforme a la norme NMB-001 du Canada.
Environmental testing		Samples of this product have been type tested in accordance with the Keysight Environmental Test Manual and verified to be robust against the environmental stresses of storage, transportation and end-use. Those stresses include but are not limited to temperature, humidity, shock, vibration, altitude and power-line conditions. Test methods are aligned with IEC 60068-2 and levels are similar to MIL-PRF-28800F Class 3.
Safety		Complies with the essential requirements of the European Low Voltage Directive as well as current editions of the following standards (dates and editions are cited in the Declaration of Conformity): – IEC/EN 61010-1 – Canada: CSA C22.2 No. 61010-1 – USA: UL std no. 61010-1

⁷⁴ From 40 °C to 50 °C, the maximum % relative humidity follows the line of constant dew point.

Power Requirements (Nom)

Number of Channels	Maximum Frequency	Power Requirements	Typical Power Consumption
1 (Opt. 001)	6 GHz or 8.5 GHz (Opt. 506 or 508)	100-120 VAC, 50/60/400 Hz, 1350 W Max 200-240 VAC, 50/60 Hz, 2000W Max.	550 W
	14 GHz or 20 GHz (Opt. 514 or 520)	100-120 VAC, 50/60/400 Hz, 1350 W Max 200-240 VAC, 50/60 Hz, 2000W Max.	600 W
	31.8 GHz, 44 GHz, or 54 GHz (Opt. 532, 544, or 554)	100-120 VAC, 50/60/400 Hz, 1350 W Max 200-240 VAC, 50/60 Hz, 2000W Max.	800 W
	31.8 GHz, 44 GHz, or 54 GHz (Opt. 532, 544, or 554) with one V3080A	100-120 VAC, 50/60/400 Hz, 1350 W Max 200-240 VAC, 50/60 Hz, 2000W Max.	821 W
2 (Opt. 001 and 002)	6 GHz or 8.5 GHz (Opt. 506 or 508)	100-120 VAC, 50/60/400 Hz, 1350 W Max 200-240 VAC, 50/60 Hz, 2000W Max.	750 W
	14 GHz or 20 GHz (Opt. 514 or 520)	100-120 VAC, 50/60/400 Hz, 1350 W Max 200-240 VAC, 50/60 Hz, 2000W Max.	860 W
	31.8 GHz, 44 GHz, or 54 GHz (Opt. 532, 544, or 554)	100-120 VAC, 50/60/400 Hz, 1350 W Max 200-240 VAC, 50/60 Hz, 2000W Max.	1200 W
	31.8 GHz, 44 GHz, or 54 GHz (Opt. 532, 544, or 554) with one V3080A	200-240 VAC, 50/60 Hz, 2000W Max.	1221 W
	31.8 GHz, 44 GHz, or 54 GHz (Opt. 532, 544, or 554) with two V3080As	200-240 VAC, 50/60 Hz, 2000W Max.	1242 W
4 (Opt. 001, 002, 003, and 004)	6 GHz or 8.5 GHz (Opt. 506 or 508)	100-120 VAC, 50/60/400 Hz, 1350 W Max 200-240 VAC, 50/60 Hz, 2000W Max.	1200 W
	14 GHz or 20 GHz (Opt. 514 or 520)	200-240 VAC, 50/60 Hz, 2000W Max.	1500 W

M9484C Physical Specifications (Nom)

	Configuration	One Channel (001)	Two Channels (002)	Four Channels (004)
Weight	Options 506, 508	61.4 lbs.	66.0 lbs.	76.2 lbs.
	Options 514, 520	63.0 lbs.	67.6 lbs.	77.8 lbs.
	Options 532, 544, 554	64.5 lbs.	73.2 lbs.	-
Dimensions	Height		193 mm	
	Width with strap handles		461.5 mm	
	Width without strap handles		445 mm	
	Length including connectors and jumper cables		635.0 mm	

V3080A Physical Specifications (Nom)

Weight	0.62 kg	
Dimensions	Height	81 mm
	Width	48 mm
	Length	116 mm

Display (Nom)

Resolution	1280 x 768 pixels
Size	10.6 in (26.9 cm) diagonal

Data Storage (Nom)

Internal	Removable solid-state drive (256 GB)
External	Supports USB 3.0/2.0 compatible memory devices

Recommended Calibration Cycle


1 year

Keysight Support Services

Accelerate your learning curve, enhance your test uptime, and confidently guarantee your instrument accuracy with Keysight Support Services. Keysight Services are here to support your test needs with expert technical support, instrument repair and calibration, training, alternative acquisition program options, and more.

A KeysightCare agreement provides dedicated, proactive support through a single point of contact for an extensive group of instruments, software, and solutions to ensure optimal uptime, with fast response times and resolution. Explore the services that are right for you.

Keysight Services

Offering	Benefits
<p>KeysightCare</p> 	<p>KeysightCare provides elevated support for Keysight instruments and software, with access to technical support experts who respond within a specified time and ensure committed repair and calibration Turnaround Times (TAT). KeysightCare offers multiple service agreement tiers, including KeysightCare Assured, Enhanced, and Application Software Support. See the KeysightCare data sheet for details.</p>
<p>KeysightCare Assured</p>	<p>KeysightCare Assured provides a commitment to respond to your engineer's technical needs quickly. When unexpected repairs are necessary, you can count on a committed repair service turnaround time to get you back up and running.</p>
<p>KeysightCare Enhanced</p>	<p>KeysightCare Enhanced includes all the benefits of KeysightCare Assured plus Keysight's accurate and reliable Calibration Services, accelerated and committed TAT, and technical response.</p>
<p>Keysight Support Portal & Knowledge Center</p>	<p>All KeysightCare tiers include access to the Keysight Support Portal, where you can manage support and service resources related to your assets, such as service requests and status, or browse the Knowledge Center.</p>
<p>Education Services</p>	<p>Build confidence and gain new skills to make accurate measurements, with flexible Education Services developed by Keysight experts. Including Start-up Assistance.</p>
<p>Alternative Acquisition Options</p>	
<p>KeysightAccess</p>	<p>Reduce budget challenges with a lease-based subscription service that offers low monthly payments, enabling you to get the instruments, software, and technical support you want for your test needs.</p>

Recommended services

Maximize your instrument uptime and confidently make accurate measurements by securing technical support, repair, and calibration services with committed response and turnaround times. High-performance instruments include 1 year of KeysightCare Assured or KeysightCare Warranty Plus. Obtain multi-year KeysightCare upfront to eliminate the need for lengthy and tedious paperwork and yearly requests for maintenance budget. Plus, you benefit from secured service for 2, 3, or 5 years.

Service	Function
KeysightCare Enhanced*	Includes Tech Support, Warranty and Calibration
R-55B-001-1	KeysightCare Enhanced – Upgrade 1 year
R-55B-001-2	KeysightCare Enhanced – Extend to 2 years
R-55B-001-3	KeysightCare Enhanced – Extend to 3 years (Recommended)
R-55B-001-5	KeysightCare Enhanced – Extend to 5 years (Recommended)
KeysightCare Assured*	Includes Tech Support and Warranty
R-55A-001-2	KeysightCare Assured – Extend to 2 years
R-55A-001-3	KeysightCare Assured – Extend to 3 years
R-55A-001-5	KeysightCare Assured – Extend to 5 years
Start-Up Assistance	
PS-S40-01	Included – instrument fundamentals and operations starter
PS-S40-04	Recommended – instrument fundamentals and operations starter
PS-S40-02	Optional, technology & measurement science standard learning

* Limited availability might apply. Please review the [service definition tool](#) for model number availability and the [datasheet](#) for country availability. Coverage might be limited to KeysightCare Warranty Plus (R-55F-001). If KeysightCare Enhanced is available, R-55B-001-2/3/5 must be ordered with R-55B-001-1.

Related Literature

Publication Title	Publication Number
M9484C VXG Configuration Guide	3121-1509EN
M9484C VXG Signal Generator Startup Guide	M9484-90001

Keysight enables innovators to push the boundaries of engineering by quickly solving design, emulation, and test challenges to create the best product experiences. Start your innovation journey at www.keysight.com.



This information is subject to change without notice. © Keysight Technologies, 2022 - 2026, Published in USA, January 14, 2026, 3122-1445.EN