

DT4224



- ✓ višenamjenski džepni model
- ✓ $\pm 0,5\%$ rdg ± 5 dgt

DC voltage	600.0 mV to 600.0 V
AC voltage	6.000 V to 600.0 V
DC + AC voltage	DT4281/4282 only
DC current	n/a
AC current	n/a
AC clamp-on measurement	Frequency
Resistance	Continuity check
Temperature	Diode test
Capacitance	Conductance
AC/DC automatic detection	Voltage detection function

196,00 EUR + PDV

176,40 EUR + PDV

DT4256-20



- ✓ višenamjenski terenski instrument
- ✓ $\pm 0,3\%$ rdg ± 3 dgt

DC voltage	600.0 mV to 1000 V
AC voltage	6.000 V to 1000 V
DC + AC voltage	DT4281/4282 only
DC current	60.00 mA to 10.00 A
AC current	600.0 mA to 10.00 A
AC clamp-on measurement	Frequency
Resistance	Continuity check
Temperature	Diode test
Capacitance	Conductance
AC/DC automatic detection	Voltage detection function

216,00 EUR + PDV

194,40 EUR + PDV

DT4261-90



- ✓ novi standardni model (2 kV s P2000 sondom)
- ✓ $\pm 0,15\%$ rdg ± 2 dgt

DC voltage	600.0 mV to 1000 V
AC voltage	6.000 V to 1000 V
DC + AC voltage	6.000 V to 1000 V
DC current	600.0 mA to 10.00 A
AC current	600.0 mA to 10.00 A
AC clamp-on measurement	Frequency
Resistance	Continuity check
Temperature	Diode test
Capacitance	Conductance
AC/DC automatic detection	Voltage detection function

366,00 EUR + PDV

329,40 EUR + PDV

DT4282



- ✓ high-end model za laboratorije i R&D
- ✓ $\pm 0,025\%$ rdg ± 2 dgt

DC voltage	60.000 mV to 1000.0 V
AC voltage	60.000 mV to 1000.0 V
DC + AC voltage	6.000 V to 1000.0 V
DC current	600.00 μ A to 10.000 A
AC current	600.00 μ A to 10.000 A
AC clamp-on measurement	Frequency
Resistance	Continuity check
Temperature	Diode test
Capacitance	Conductance
AC/DC automatic detection	Voltage detection function

576,00 EUR + PDV

518,40 EUR + PDV

3288-20



- ✓ AC / DC DMM
- ✓ true RMS
- ✓ 100 A / 1.000 A
- ✓ 10 Hz do 500 Hz
- ✓ promjer otvora 35 mm
- ✓ rezolucija 0,1 A



306,00 EUR + PDV

275,40 EUR + PDV

3287



- ✓ AC / DC DMM
- ✓ true RMS
- ✓ 10 A / 100 A
- ✓ 10 Hz do 1 kHz
- ✓ promjer otvora 35 mm
- ✓ rezolucija 0,01 A



356,00 EUR + PDV

320,40 EUR + PDV

CM4371-50



- ✓ AC / DC DMM
- ✓ true RMS
- ✓ 20 A / 600 A
- ✓ 10 Hz do 1 kHz
- ✓ promjer otvora 33 mm
- ✓ rezolucija 0,01 A



496,00 EUR + PDV

446,40 EUR + PDV

CM4375-50




- ✓ AC / DC DMM
- ✓ true RMS
- ✓ 1000 A
- ✓ 10 Hz do 1 kHz
- ✓ promjer otvora 34 mm
- ✓ rezolucija 0,1 A



566,00 EUR + PDV

509,40 EUR + PDV

BT3554-51

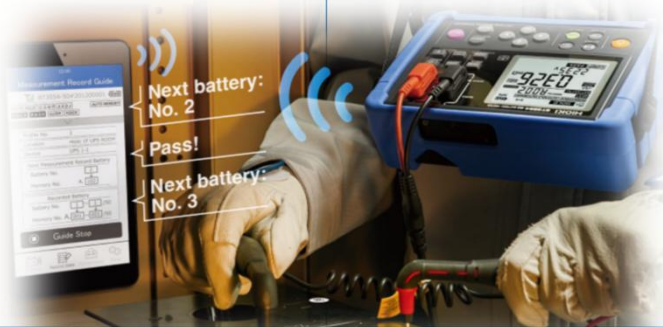

BT3554-52



OSNOVNE SPECIFIKACIJE:

- ✓ raspon napona 6 V do 60 V
- ✓ raspon otpora 3 mΩ do 3 Ω
- ✓ priprema za Bluetooth bežični adapter Z3210 (naručuje se zasebno)
- ✓ uključena sonda s ravnom iglom 9465-10

PRIMJENA:

- ✓ održavanje i pregled olovnih baterija
- ✓ dijagnostika UPS-a i pričuvnih sustava napajanja
- ✓ dizajniran za VRLA baterije svih veličina i kapaciteta

2.158,00 EUR + PDV

1.942,20 EUR + PDV

OSNOVNE SPECIFIKACIJE:

- ✓ raspon napona 6 V do 60 V
- ✓ raspon otpora 3 mΩ do 3 Ω
- ✓ priprema za Bluetooth bežični adapter Z3210 (naručuje se zasebno)
- ✓ uključena sonda s kutnom iglom L2020

PRIMJENA:

- ✓ održavanje i pregled olovnih baterija
- ✓ dijagnostika UPS-a i pričuvnih sustava napajanja
- ✓ dizajniran za VRLA baterije svih veličina i kapaciteta

2.218,00 EUR + PDV

1.996,20 EUR + PDV